

UNCLASSIFIED

AD NUMBER	
AD373662	
CLASSIFICATION CHANGES	
TO:	unclassified
FROM:	confidential
LIMITATION CHANGES	
TO:	Approved for public release, distribution unlimited
FROM:	Distribution authorized to U.S. Gov't. agencies and their contractors; Administrative/Operational Use; JUL 1966. Other requests shall be referred to Air Force Rocket Propulsion Lab., Edwards AFB, CA.
AUTHORITY	
31 Jul 1978, DoDD 5200.10; AFRPL ltr, 12 Dec 1985	

THIS PAGE IS UNCLASSIFIED

# **SECURITY**

---

# **MARKING**

**The classified or limited status of this report applies to each page, unless otherwise marked.**

**Separate page printouts MUST be marked accordingly.**

---

**THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING OF THE ESPIONAGE LAWS, TITLE 18, U.S.C., SECTIONS 793 AND 794. THE TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW.**

**NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.**

373662

[REDACTED]

AFRPL-TR-66-122

(Unclassified Title)

FINAL REPORT,  
ENGINEERING PROPERTIES OF ROCKET PROPELLANTS

Contract AF04(611)-10546

By

M. T. Constantine

July 1966

Sponsored By

Air Force Rocket Propulsion Laboratory  
Research and Technology Division  
Air Force Systems Command  
Edwards Air Force Base, California

RECEIVED  
JUL 19 1966  
AFRPL

In addition to security requirements which must be met, this document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of AFRPL (RPPR-STINFO), Edwards, California 93523.

THIS MATERIAL CONTAINS INFORMATION AFFECTING THE NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING OF THE ESPIONAGE LAWS TITLE 18 U.S.C. SECTIONS 793 AND 794 THE TRANSMISSION OR REVELATION OF WHICH IN ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW

[REDACTED]

## **REPRODUCTION QUALITY NOTICE**

This document is the best quality available. The copy furnished to DTIC contained pages that may have the following quality problems:

- Pages smaller or larger than normal.
- Pages with background color or light colored printing.
- Pages with small type or poor printing; and or
- Pages with continuous tone material or color photographs.

Due to various output media available these conditions may or may not cause poor legibility in the microfiche or hardcopy output you receive.

☐

If this block is checked, the copy furnished to DTIC contained pages with color printing, that when reproduced in Black and White, may change detail of the original copy.

**NOTICE**

**UNITED STATES PATENT OFFICE SECRECY ORDER**

A patent application has been filed in the U. S. Patent Office by North American Aviation, Inc. based upon subject matter included herein or related hereto, and the Secrecy Order appended hereto has been issued thereon pursuant to Title 35, United States Code (1952) Sections 181-188. Further dissemination of said subject matter is prohibited except in strict compliance with said order. The recipient of this document is requested to notify all persons who will have access to this material of the Secrecy Order. Penalties for violation of a Secrecy Order include a fine of up to \$10 000 or imprisonment for not more than two years, or both.

**DEPARTMENT OF COMMERCE**  
United States Patent Office  
Washington

**DEPARTMENT OF COMMERCE**  
United States Patent Office  
Washington

**SECRECY ORDER**

**NOTICE:** To the applicant above named, his heirs, and any and all his assignees, attorneys and agents, hereinafter designated principals:

You are hereby notified that your application as above identified has been found to contain subject matter, the unauthorized disclosure of which might be detrimental to the public safety or defense, and you are ordered in nowise to publish or disclose the invention or any material information with respect thereto, including hitherto unpublished details of the subject matter of said application, in any way to any person not cognizant of the invention prior to the date of the order, including any employee of the principals, but to keep the same secret except by written permission first obtained of the Commissioner of Patents, under the penalties of 35 U. S. C. (1952) 182, 186.

Any other application which contains any significant part of the subject matter of the above identified application falls within the scope of this order. If such other application does not stand under a secrecy order, it and the common subject matter should be brought to the attention of the Patent Security Division, Patent Office.

If prior to the issuance of the secrecy order any significant part of the subject matter has been revealed to any person, the principals shall promptly inform such person of the secrecy order and the penalties for improper disclosure.

This order should not be construed in any way to mean that the Government has adopted or contemplates adoption of the alleged invention disclosed in this application, nor is it any indication of the value of such invention.

**PERMIT FOR PATENT APPLICATION**  
**CLASSIFIED BY GOVERNMENT CONTRACT**

This permit authorizes the principals, as designated in the secrecy order, to take any action with regard to the subject matter of the application, to the extent authorized by the security requirements of the Government contract which imposes the highest security classification on the subject matter of this application, except that this permit does not authorize export of this application or the subject matter thereof, whether for the foreign filing of corresponding applications or otherwise. Permission for such export must be specifically obtained from the Patent Office.

When U. S. Government drawings, specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise, or in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

[REDACTED]

(Unclassified Title)

AETRPL-TR-66-122

FINAL REPORT,  
ENGINEERING PROPERTIES OF ROCKET PROPELLANTS

By

M. T. Constantine

Group 4  
Downgraded at 3-Year Intervals  
Declassified After 12 Years

In addition to security requirements which must be met, this document is subject to special export controls and each transmittal to foreign governments or foreign nationals may be made only with prior approval of AETRPL(RPPR-STINFO), Edwards, California 93523.

# FOREWORD

This is the final and summary progress report submitted under G.O. 8695 in compliance with Contract AF04(611)-10546, Part I, Para. B2. The research reported herein, which covers the period of 1 April 1965 through 31 March 1966, was sponsored by the Air Force Rocket Propulsion Laboratory, Research and Technology Division, Air Force Systems Command, Edwards, California, with Mr. R. A. Biggers acting as the Air Force Project Engineer.

This program was conducted in the Chemical Research Section of the Rocketdyne Research Division, with Dr. J. Silverman serving as Program Manager and Mr. M. T. Constantine serving as Responsible Project Scientist.

This report has been assigned the Rocketdyne identification number R-6555.

The following technical personnel contributed to the work described in this report:

Phase I: Literature Survey

A. H. Rock

M. J. Seric

K. J. Youel

Phase II: Experimental Physical Property Characterization

G. L. Bauerle (Viscosity, Inert Gas Solubility)

Dr. J. Gerhauser (Specific Heat)

Dr. J. V. Hamilton (Specific Heat)

J. V. Lecce (Thermal Conductivity)

**CONFIDENTIAL**

AFPL-TR-66-122

I. Quaglino (Density, Vapor Pressure, Sonic Velocity)

Dr. S. R. Rodriguez (Viscosity)

M. J. Seric (Inert Gas Solubility)

Phase III: Data Evaluation

A. H. Rock

K. J. Youel

This technical report has been reviewed and is approved.

GEORGE T. BABITS, Lt Colonel, USAF  
Chief, Propellant Division

ABSTRACT

The results of a 12-month program on the analytical and experimental characterization of the physical properties of selected liquid propellants are presented in three phases. In Phase I, a literature survey was conducted to update the presently available compilation of physical properties data. Phase II experimental efforts have resulted in the measurement of  $N_2H_4-(CH_3)_2N_2H_2$  (50-50) and  $CH_3N_2H_2$  thermal conductivity; IRFNA and  $ClF_3$  sonic velocity;  $ClF_3$  and  $CH_3N_2H_2$  specific heat, and correction of  $ClF_3$  specific heat data;  $ClF_3$  phase properties; and the design and assembly of apparatuses for measurement of inert gas solubility in liquids and liquid viscosities at extended temperatures and pressures. Phase III efforts included the assembly and evaluation of physical property data on MMF-1, MMF-5, MMF-7,  $ClF_3$ , and  $ClF_3$  for future summary publication and correlation of all data generated in Phases I and II.

(Confidential Abstract)

**CONFIDENTIAL**



# CONFIDENTIAL

AFRPL-TR-66-122

## CONTENTS

Foreword . . . . .	iii
Abstract . . . . .	iv
Introduction . . . . .	1
<u>Technical Program</u> . . . . .	7
Phase I: Literature Survey . . . . .	7
Objective . . . . .	7
Results and Accomplishments . . . . .	8
Phase II: Experimental Physical Property Characterization . . . . .	11
Objective . . . . .	11
Results and Accomplishments . . . . .	11
Phase III: Data Evaluation . . . . .	65
Objective . . . . .	65
Results and Accomplishments . . . . .	65
Future Effort . . . . .	75
References . . . . .	75
<u>Appendix A</u>	
MNF-1 (25.3 w/o $N_2H_4$ , 45.3 w/o $CH_3N_2H_5$ , 31.4 w/o $N_2H_5NO_3$ )	
Bibliography . . . . .	A-1
<u>Appendix B</u>	
MNF-5 (86 w/o $CH_3N_2H_5$ , 14 w/o $N_2H_4$ ) Bibliography . . . . .	
	B-1
<u>Appendix C</u>	
MNF-5 (55 w/o $CH_3N_2H_5$ , 26 w/o $N_2H_4$ , 19 w/o $N_2H_5NO_3$ )	
Bibliography . . . . .	C-1
<u>Appendix D</u>	
Chlorine Trifluoride Bibliography . . . . .	D-1
<u>Appendix E</u>	
Chlorine Pentafluoride Bibliography . . . . .	E-1

# CONFIDENTIAL

AFRPI-TR-66-122

## ILLUSTRATIONS

1. Thermal Conductivity Cell . . . . .	14
2. Thermal Conductivity of $N_2H_4 - (CH_3)_2N_2H_2$ (50-50) Fuel Blend . . . . .	18
3. Thermal Conductivity of Monomethylhydrazine . . . . .	24
4. Sonic Velocity Apparatus . . . . .	25
5. Sonic Velocity and Compressibility of IRFNA . . . . .	29
6. Sonic Velocity and Compressibility of $ClF_3$ . . . . .	31
7. Block Diagram of Circuit Used in Specific Heat Measurements . . . . .	35
8. Specific Heat of Chlorine Trifluoride . . . . .	40
9. Specific Heat of Monomethylhydrazine . . . . .	44
10. Specific Heat of Chlorine Pentafluoride . . . . .	47
11. Poole-Nyberg Densimeter . . . . .	49
12. Density vs Temperature Curve for $ClF_3$ . . . . .	55
13. Schematic of Test Setup for Inert Gas Solubility Determination . . . . .	59
14. Viscosity of Chlorine Pentafluoride . . . . .	72

PREVIOUS PAGE WAS BLANK THEREFORE WAS NOT FILMED

# CONFIDENTIAL

AFMPL-TR-66-122

## TABLES

1.	Experimental Results of Thermal Conductivity Measurements on the $N_2H_4-(CH_3)_2N_2H_2$ (50-50) Fuel Blend . . . . .	16
2.	Experimental Results of Thermal Conductivity Measurements on Monomethylhydrazine . . . . .	20
3.	Experimental Sonic Velocity Data for Liquid $ClF_3$ and IRENA . . . . .	28
4.	Experimental Specific Heat Data for $ClF_3$ . . . . .	38
5.	Specific Heat Data for $CH_3N_2H_2$ . . . . .	42
6.	Specific Heat of $ClF_3$ . . . . .	45
7.	Experimental Density Data for Liquid $ClF_3$ . . . . .	55
8.	Experimental Vapor Pressure Data for $ClF_3$ . . . . .	57
9.	Selected Oxidizer Physical Property State of the Art . . . . .	67
10.	Selected Fuel Physical Property State of the Art . . . . .	68

PREVIOUS PAGE WAS BLANK THEREFORE WAS NOT FILMED

**CONFIDENTIAL**

AFRPL-TR-66-122

## INTRODUCTION

Successful design and development of an operational liquid propulsion missile system is dependent on the state of the technology of the propellants utilized in the system. Comprehensive knowledge of the propellant's phase, thermodynamic, transport, and electromagnetic properties is required for the detailed design and operation of the complex physical and chemical processes involved in tankage, pumping, expulsion, injection, combustion, heat transfer, etc., that are integral parts of the missile system.

Frequently, the acquisition of these necessary physical property data has lagged development of propulsion systems using the propellants. Although partial physical characterization of the propellants has enabled initial system development efforts, serious gaps in other essential physical property data have been the pacing factors in reducing the systems to complete operational practice. In addition, analysis and utilization of many propellant candidates have been somewhat curtailed by insufficient physical data. The requirements for more extensive data in these areas have become increasingly evident as the application ranges of the propellants are extended by the vehicle design demands of more stringent missions.

Based on this continuous requirement for accurate physical property data on a variety of current and near-term propellants, Rocketdyne initiated a program under Contract AF04(611)-10546. This program consisted of systematic physical property characterization of selected liquid propellants of interest to the Air Force over temperature and pressure ranges practical to propulsion system engineering.

A 12-month effort, started in April 1967, was conducted in three phases, all of which pertain to the rational and systematic physical characterization of liquid propellants. Phase I consisted of a literature survey to document all reported physical property data on propellants of interest to the Air Force. Under Phase II, unavailable and essential physical properties

**CONFIDENTIAL**

**CONFIDENTIAL**

AFRPL-TR-66-122

of selected propellants were experimentally determined. Phase III comprised the evaluation of data generated in Phases I and II and subsequent Phase II direction of effort.

This report describes each phase of the program in terms of objective, and results and accomplishments.

**CONFIDENTIAL**

CONFIDENTIAL


AFRPL-TR-66-122

SUMMARY


Analytical and experimental research conducted during a 12-month period on a program to complete the data on essential physical properties of current and near-term propellants of interest to the Air Force is described in three phases.

Phase I consisted of a literature survey to update the presently available compilation of physical properties data. Continuation of the survey of current propellant literature over the entire 12-month period, to supplement the original 1- to 2-month concentrated, comprehensive literature survey, was performed as a part of Rocketdyne's normal in-house funding.

The experimental characterization of essential physical properties of selected propellants was conducted under Phase II. Experimental efforts were directed at measurements of thermal conductivity, sonic velocity (and compressibility), specific heat, density, inert gas solubility, and viscosity of selected propellants in an order related to their importance to the Air Force. Liquid thermal conductivity measurements were completed under saturated conditions on the  $N_2H_4-(CH_3)_2N_2H_2$  (50-50) fuel blend at temperatures from 50 to 505 F and on monomethylhydrazine at temperatures from -50 to 505 F through use of a steady-state concentric-cylinder conductivity cell. The valid data were curve-fitted with the following equations:



$$k_{(BTU/hr-ft-F)} = 0.171 - 6.45 \times 10^{-7} T_{(F)} - 1.25 \times 10^{-7} T_{(F)}^2$$



$$k_{(BTU/hr-ft-F)} = 0.146 - 1.65 \times 10^{-7} T_{(F)} - 5.59 \times 10^{-7} T_{(F)}^2$$

As a result of apparatus checkout tests, sonic velocity was measured in a 50 w/o aqueous solution of HF at 77 F (1540 m/sec) and in propellant grade IRFNA from 59 to 80 F (1428 to 1517 m/sec). Data resulting from

3  
CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

measurements of sonic velocity in  $\text{ClF}_3$  over a temperature range of 52 to 164 F were curve-fitted with the following equation:

$$c(\text{m/sec}) = 4.594 \times 10^3 - 2.226 \times 10^1 T_{(C)} + 2.954 \times 10^{-2} T_{(C)}^2$$

Adiabatic compressibilities calculated from these data ranged from  $2.154 \times 10^{-6}$  to  $2.572 \times 10^{-6} \text{ psi}^{-1}$  (59 to 80 F) for IRFNA and established the following relationship for  $\text{ClF}_3$ :

$$\beta_s (\text{psi}^{-1}) = 5.551 \times 10^1 - 4.990 \times 10^{-1} T_{(C)} + 1.181 \times 10^{-5} T_{(C)}^2$$

Equations for the specific heats of  $\text{ClF}_3$  and  $\text{CH}_3\text{N}_2\text{H}_3$  were derived from data taken in experimental measurements using an adiabatic calorimeter. The specific heat of  $\text{ClF}_3$  under saturated conditions from 14 F to 173 F is:

$$C_s (\text{cal gm-K}) = -0.8946 + 0.9815 \times 10^{-2} T_{(K)} - 0.2881 \times 10^{-4} T_{(K)}^2 + 0.5050 \times 10^{-7} T_{(K)}^3$$

Monomethylhydrazine specific heat from 68 F to 248 F is:

$$C_s (\text{cal gm-K}) = -0.7458 + 0.1152 \times 10^{-1} T_{(K)} - 0.2965 \times 10^{-4} T_{(K)}^2 + 0.2648 \times 10^{-7} T_{(K)}^3$$

Data obtained previously on  $\text{ClF}_3$  specific heat were corrected by apparatus calibration and curve-fitted from -58 F to 122 F with the following equation:

$$C_s (\text{cal gm-K}) = 1.0847 - 0.9522 \times 10^{-2} T_{(K)} + 0.5595 \times 10^{-4} T_{(K)}^2 - 0.4509 \times 10^{-7} T_{(K)}^3$$

A Poole-Nyberg densimeter was used to measure  $\text{ClF}_3$  density over a temperature range of 52 F to the critical point. These data corresponded with previously

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

determined data and were used to establish a saturated density-temperature relationship of:

$$\rho \text{ (g/cc)} = 5.433 - 2.955 \times 10^{-2} T_{(K)} + 8.625 \times 10^{-5} T_{(K)}^2 - 9.374 \times 10^{-8} T_{(K)}^3$$

over a temperature range of 25 F to 522 F. The data were extrapolated graphically to the critical point by means of additional experimentally obtained points. Vapor pressure data and further verification of the density data were obtained on  $\text{ClF}_3$  near the critical point from a constant volume vapor pressure bomb. The critical temperature of  $\text{ClF}_3$ , determined from observation of the liquid-vapor meniscus disappearance, is 555.5 F.

Design, fabrication, and calibration of an apparatus to measure inert gas solubility in liquid propellants has been completed. The apparatus was passivated and loaded with  $\text{ClF}_3$ ; preliminary  $\text{N}_2$  (g) solubility measurements have been initiated in this propellant.

Final assembly of an all-metal capillary viscometer is nearly completed. With this apparatus, the motion of the liquid-gas interface within the steel tubing of the apparatus is followed by means of a magnetic steel float at the interface and a differential transformer surrounding the tube. Initial measurements will extend present  $\text{ClF}_3$  viscosity data to higher temperatures and pressures.

Phase III involved the overall analysis, correlation and evaluation of data generated in Phases I and II. Initial efforts in the phase resulted in location of data gaps and formation of the experimental plan of action for Phase II effort. Additional effort provided complete physical property bibliographies for MMF-1, MMF-3, MMF-5,  $\text{ClF}_3$ , and  $\text{ClF}_2$ , and initiated the cataloging of these data for future summary publication. Data correlation efforts resulted in curve-fitting two different sets of  $\text{ClF}_3$  viscosity data from -150.5 to 68 F with the following equation:

$$\log \mu(\text{lb ft-sec}) = -4.80158 + 604.145/T(R)$$

CONFIDENTIAL



# CONFIDENTIAL

AFRPL-TR-66-122

## TECHNICAL PROGRAM

### PHASE I: LITERATURE SURVEY

#### OBJECTIVE

The Phase I objective was a 1- to 2-month literature survey to update and supplement Rocketdyne's present compilation and documentation of liquid propellant property data over operational temperature and pressure ranges. This survey was designed to review all propellants of present and near-future interest to the Air Force, with primary emphasis placed on the following fuels and oxidizers:

<u>Fuels</u>	<u>Oxidizers</u>
Liquid hydrogen ( $\text{H}_2$ )	Liquid oxygen ( $\text{LO}_2$ )
UDMH- $\text{N}_2\text{H}_4$ (50-50)	Chlorine pentafluoride ( $\text{ClF}_5$ )
Hydrazine ( $\text{N}_2\text{H}_4$ )	Chlorine trifluoride ( $\text{ClF}_3$ )
UDMH [ $(\text{CH}_3)_2\text{N}_2\text{H}_2$ ]	Fluorine ( $\text{F}_2$ )
MMH ( $\text{CH}_3\text{N}_2\text{H}_3$ )	Hydrogen peroxide ( $\text{H}_2\text{O}_2$ )
$\text{N}_2\text{H}_4$ -MMH- $\text{H}_2\text{O}$ mixture	Nitrogen tetroxide ( $\text{N}_2\text{O}_4$ )
Hyhaline A-5	Mixed oxides of nitrogen (MON)
Hyhaline B-3	FLOX mixtures ( $\text{O}_2$ - $\text{F}_2$ )
Alumizine	Oxygen difluoride ( $\text{OF}_2$ )
Pentaborane ( $\text{B}_5\text{H}_9$ )	Tetrafluorohydrazine ( $\text{N}_2\text{F}_4$ )
Diborane ( $\text{B}_2\text{H}_6$ )	
MAF fuels	

PREVIOUS PAGE WAS BLANK THEREFORE WAS NOT FILMED

**CONFIDENTIAL**

AFRPI-TR-65-122

## RESULTS AND ACCOMPLISHMENTS

The comprehensive survey of the propellant properties literature, conducted as Phase I, was completed during the first quarter of the program. This concentrated effort, directed primarily at propellants of interest to the Air Force (as noted in the Phase I objectives), was materially minimized by previous Rocketdyne efforts in this area. During the remainder of the program, a continuous documentation of current propellant properties literature was maintained as part of a normal in-house function.

A major portion of the literature survey was centered around the following reference sources:

1. Chemical Propulsion Agency Abstracts (formerly Chemical Propulsion Information Agency and Liquid Propulsion Information Agency), 1958 to the present
2. Chemical Abstracts, 1907 to the present
3. Gmelin's Handbuch der anorganischen Chemie, Berlin (Earliest work on a given compound through 1936 and 1937; revisions and addenda from 1958 to the present)
4. NASA CSTAR Abstracts, 1959 to the present
5. Technical Abstract Bulletin (TAB) Index, Defense Documentation Center (formerly ASTIA), 1958 to the present

In addition to the above references, original propellant data sources were located through:

1. International Critical Tables, Vol. I-VIII, published in 1928
2. Various text books on chemical compounds
3. Propellant handbooks compiled within the propulsion community (including the liquid propellant manuals compiled by Battelle Memorial Institute and the Chemical Propulsion Agency)

**CONFIDENTIAL**

**CONFIDENTIAL**

AFRPI-TR-66-122

4. Propellant manufacturers' information texts, propellant data brochures, and research reports
5. Rocketdyne and University of California at Los Angeles (UCLA) library references

All reference data not on file at Rocketdyne were ordered from the original source wherever possible. When this was impractical or impossible, reprints of the data were ordered from secondary sources such as ASTIA, UCLA, etc. Upon acquisition, all material was checked for other data references; any additional sources noted were ordered. The data contained in the material generated by this survey were compiled and evaluated under Phase III.

**CONFIDENTIAL**

**CONFIDENTIAL**

AFRPL-TR-66-122

## PHASE II: EXPERIMENTAL PHYSICAL PROPERTY CHARACTERIZATION

### OBJECTIVE

Phase II was a 12-month effort directed at the experimental characterization of essential physical properties of selected propellants. During the initial weeks of the program, a list of required physical properties of a variety of propellants related to immediate Air Force needs were to be ranked in order of importance. Upon approval of this list by the Air Force Project Engineer, experimental efforts were to begin on those property determinations ranked highest in importance; property determinations of lesser importance were to be undertaken as required.

### RESULTS AND ACCOMPLISHMENTS

Phase I and III efforts during the first month of the program established an experimental plan for Phase II measurements. With concurrence of the Air Force Project Engineer, experimental efforts were directed at measurements of thermal conductivity, sonic velocity (and compressibility), specific heat, density and vapor-liquid relationships, inert gas solubility, and viscosity on selected propellants. The order of propellants characterized is given in the Phase III discussion.

Four basic factors were considered as primary qualifications in selection of the techniques and apparatuses used in the experimental determination:

1. The technique and apparatus for each particular property is applicable (or readily adaptable) for use with a maximum variety of propellants.
2. Accuracies achieved with the selected techniques are consistent with those required in system application of the particular propellant.

PREVIOUS PAGE WAS BLANK THEREFORE WAS NOT FILMED

**CONFIDENTIAL**

**CONFIDENTIAL**

AFRPL-TR-66-122

3. Standard test methods are used wherever possible.
4. There is a consideration of measurement cost; wherever possible, available apparatus is utilized.

After apparatus and technique selections were completed, apparatus preparation was initiated. Some of the desired physical property measurements required the design and fabrication of new apparatuses; preparation for other measurements required only the calibration of available apparatuses. Upon completion of apparatus preparation, experimental measurements were started with the propellant of choice; additional propellants were characterized as time permitted.

During the program, experimental measurements were conducted on the thermal conductivity of  $N_2H_4-(CH_3)_2N_2H_2$  (50-50) and  $CH_3N_2H_3$ , sonic velocity (and compressibility) in IRENA and  $ClF_3$ , specific heat of  $ClF_3$  and  $CH_3N_2H_3$ , and the density (and vapor-liquid relationships) of  $ClF_3$ . Inert gas solubility measurements were initiated on  $ClF_3$  and final assembly of an apparatus for  $ClF_3$  viscosity measurements was nearly complete. In addition, experimental data previously determined for  $ClF_3$  specific heat (Ref. 1) were corrected through apparatus calibrations.

The efforts conducted under each of these areas of study are described in the following paragraphs. Included in the discussion of the technical accomplishments and results under this program are the results of  $ClF_3$  critical temperature measurements conducted under company-sponsored funding.

#### Thermal Conductivity

The thermal conductivity of two propellants, 50 w/o hydrazine-50 w/o unsymmetrical dimethylhydrazine fuel blend, and monomethylhydrazine, was measured during this program. The apparatus used for obtaining thermal conductivity data was a steady-state, concentric-cylinder conductivity cell. This apparatus was in existence at the outset of the current investigation. It was built by Rocketdyne several years ago to measure thermal conductivity of liquid propellants, and the construction materials were compatible with the propellants of interest in this current effort.

**CONFIDENTIAL**

**CONFIDENTIAL**

AFRPL-TR-66-122

The cell used in this program is shown schematically in Fig. 1. The test fluid is contained in a thin annular passage between two aluminum alloy cylinders. The annulus is approximately 1-inch in diameter, 0.020-inch thick, and 5-3/4-inches long. The ends of the annulus are sealed with two Teflon O-rings, which hold the cylinders concentrically and minimize the heat conduction path between the cylinders. To keep end effects at a minimum, two thermal barriers fabricated of Teflon are fitted over the ends of the cylinders. The cell is held together by two stainless-steel end plates which fit over the thermal barriers.

Six pairs of copper-constantan thermocouples are imbedded at various positions in both cylinders, close to the surface of the cavity containing the test fluid. Thermocouple wire diameter is as small as possible to minimize heat losses. An electrical resistance heater, located in the inner cylinder, supplies the heat energy to establish a temperature gradient across the liquid layer. The temperature of the outer cylinder is maintained by a constant temperature bath.

The experimental procedure is straight-forward but rather tedious. A sample of the test fluid is placed into a stainless-steel loading apparatus which is attached to the cell. By proper manipulation of valves on the loading apparatus, the annulus is first evacuated and the test fluid is drawn into the cell. The cell is placed in a constant-temperature bath and the bath fluid is adjusted to a preselected and regulated temperature. Electrical power is applied to the cell heater through use of a regulated d-c power supply until a temperature gradient of the desired magnitude is obtained across the annulus. Temperature gradients are kept to about 1 F to minimize convection. After thermal equilibrium is attained, measurements of heater voltage and current are made through use of a Leeds and Northrup K-5 potentiometer in conjunction with a precision volt box and current shunt. This instrument is also used to measure the temperature gradient across the annulus and the bath temperature.

**CONFIDENTIAL**

CONFIDENTIAL

AFRPT-TR-66-122

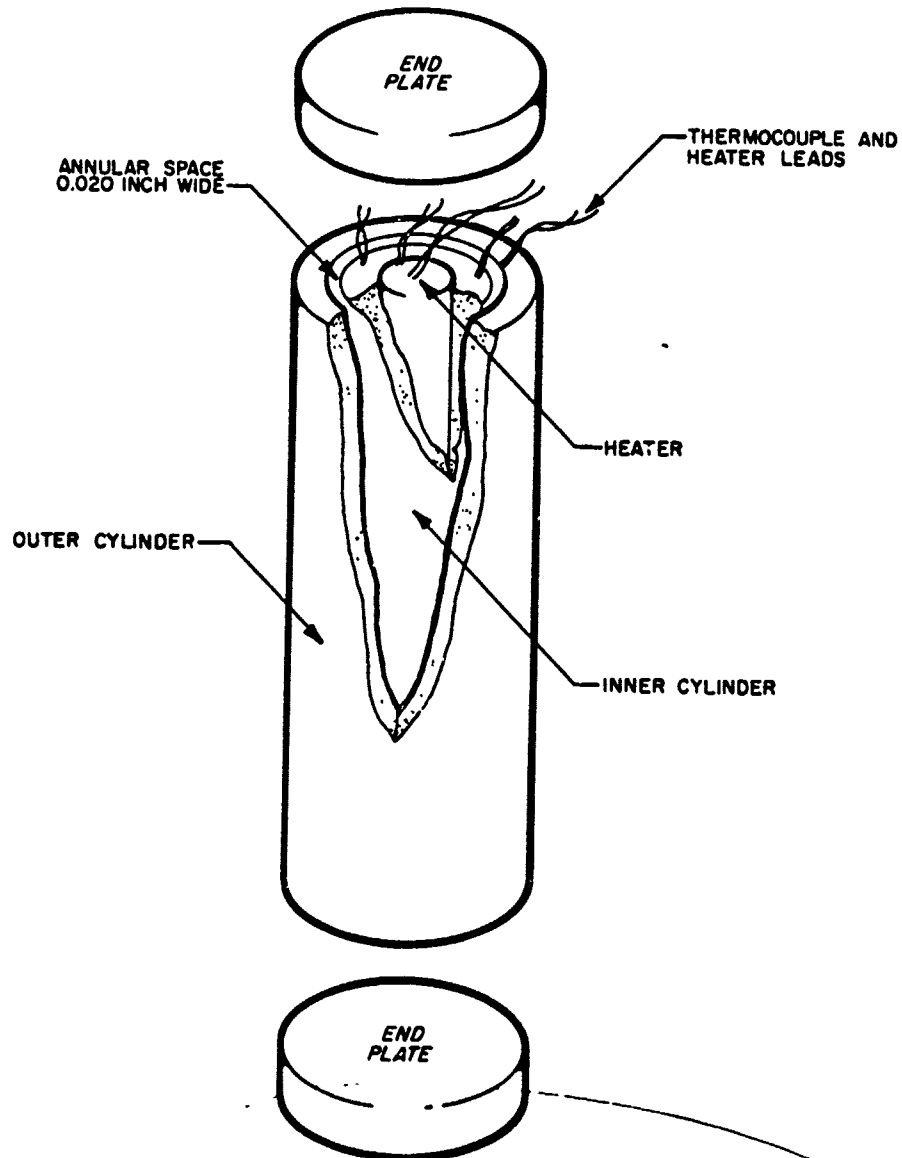


Figure 1. Thermal Conductivity Cell.

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

The thermal conductivity of the test fluid is calculated through use of the equation:

$$k = \frac{Q \Delta X}{A \Delta T}$$

where

k = thermal conductivity, Btu/hr-ft-F

Q = heat flux, Btu/hr

A = heat transfer area normal to heat flux, ft<sup>2</sup>

$\Delta X$  = liquid layer thickness, ft

$\Delta T$  = temperature gradient, F

50 Percent Hydrazine-50 Percent Unsymmetrical Dimethylhydrazine Fuel Blend

Thermal Conductivity. Prior to making actual thermal conductivity measurements on the  $N_2H_4-(CH_3)_2N_2H_2$  (50-50) fuel blend, a series of vacuum calibrations of the cell was conducted. These calibrations were necessary to account for cell heat losses along thermocouple and heater wires and through the ends of the cylinders. Calibrations were made at 50 F intervals throughout a temperature range of 50 to 550 F. Electrical power levels required to maintain given temperature gradients ( $\sim 1$  F) across the annulus were measured at each operating temperature. These heat losses are subtracted from the total heat ~~input~~ measured during actual thermal conductivity runs to obtain a net heat input.

Thermal conductivity measurements were made on the  $N_2H_4-(CH_3)_2N_2H_2$  (50-50) fuel blend over a nominal temperature range of 50 to 505 F; the results of these measurements are presented in Table 1. The initial series of thermal conductivity measurements were conducted on a propellant charge (sample A) at 50 F intervals from 50 to 250 F. Intended measurements at higher temperatures were discontinued on this particular sample because of a slight

CONFIDENTIAL



CONFIDENTIAL

AFRPL-TR-66-122

TABLE 1

EXPERIMENTAL RESULTS OF THERMAL CONDUCTIVITY MEASUREMENTS ON THE  
 $N_2H_4-(CH_3)_2N_2H_2$  (50-50) FUEL BLEND

Sample	Temperature, F	Thermal Conductivity, Btu/hr-ft-F
A*	50.88	0.168
A	50.89	0.167
A	100.36	0.163
A	100.35	0.162
A	150.71	0.157
A	150.71	0.159
A	200.91	0.151
A	200.91	0.152
B*	200.93	0.154
B	200.93	0.155
A	251.19	0.146
A	251.19	0.145
B	251.24	0.150
B	251.22	0.146
C*	305.14	0.138
C	305.15	0.139
C	305.16	0.141

\*Sample Composition:  $N_2H_4$ , 51.2 weight percent  
 $(CH_3)_2N_2H_2$ , 48.3 weight percent  
Water and other solubles, 0.5 weight percent

CONFIDENTIAL

# CONFIDENTIAL

AFRPL-TR-66-122

pressure increase in the cell. This pressure increase, indicative of propellant decomposition, was observed after maintaining the cell at 250 F overnight (~ 18 hours).

Because propellant decomposition may have occurred prior to or during measurements at 250 F, repeat measurements were made on a new propellant charge (sample B) with an identical sample composition at temperatures of 200 and 250 F for verification purposes. The data obtained compared favorably with the initial data at these temperatures.

With the same propellant charge (sample B), an unsuccessful attempt was made to obtain data at ~ 500 F. Because of difficulties encountered in maintaining proper bath temperature control, the propellant was exposed to the high temperature (~500 F) for a prolonged period. As a result, excessive pressure increases were again noted in the cell at this point. A third propellant charge (sample C) of the original batch was successfully used to obtain thermal conductivity data at 305 F.

The data were curve-fitted from 50 to 305 F with the following equation:

$$k_{\text{(Btu/hr-ft F)}} = 0.171 - 6.45 \times 10^{-5} T_{\text{(F)}} - 1.25 \times 10^{-7} T_{\text{(F)}}^2$$

The multiple error of estimate of the least square curve-fit is 0.001. A graphical representation of the data is shown in Fig. 2.

Chemical analysis of the fuel blend batch used in all three samples indicated the following composition:

$\text{N}_2\text{H}_4$  - 51.2 weight percent

$(\text{CH}_3)_2\text{N}_2\text{H}_2$  - 48.5 weight percent

$\text{H}_2\text{O}$  plus other soluble impurities - 0.5 weight percent

CONFIDENTIAL

AFRPL-TR-66-122

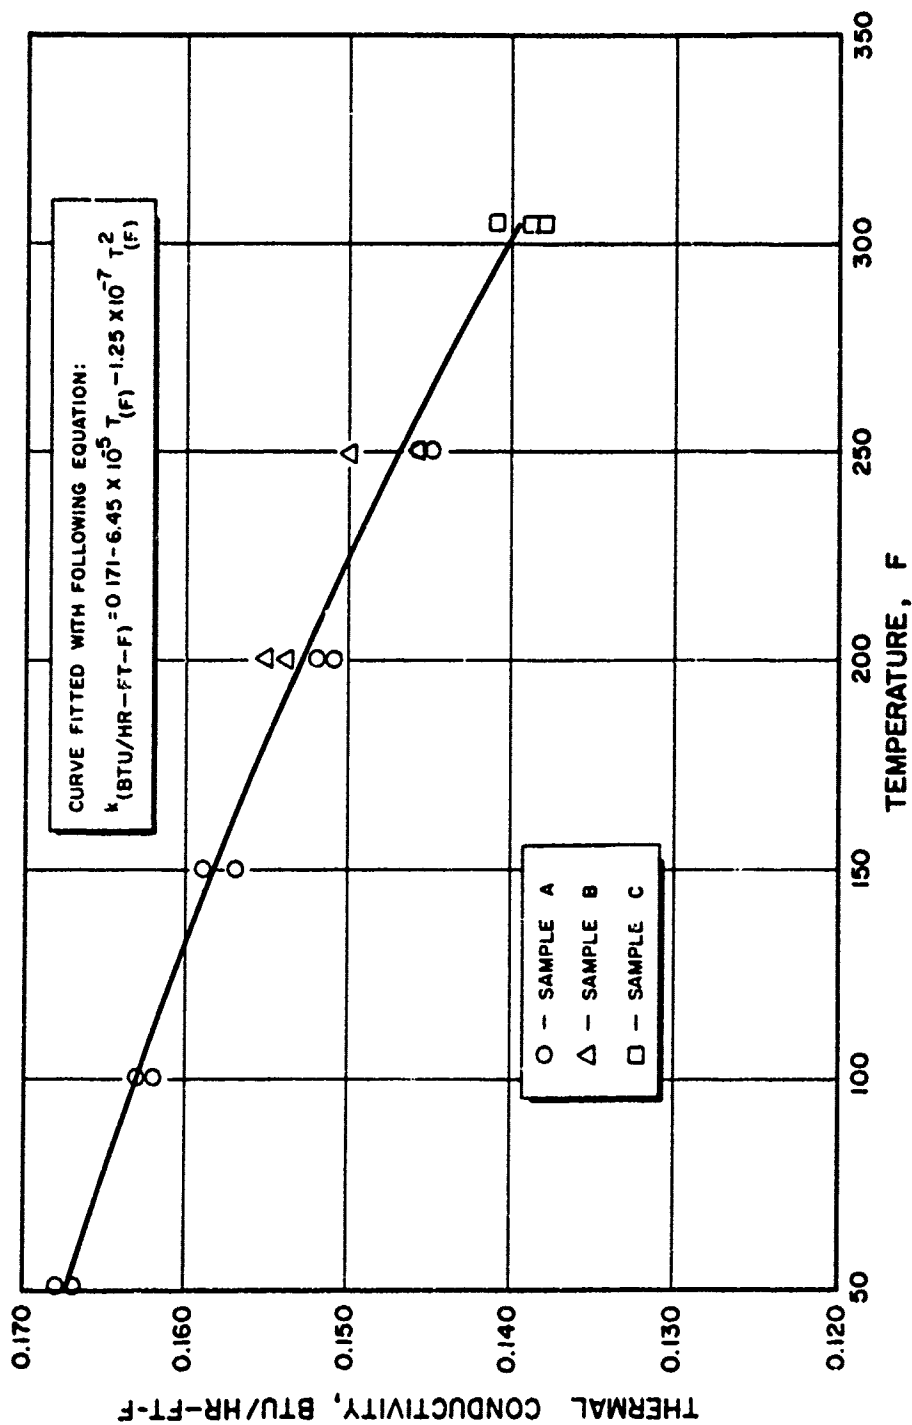


Figure 2. Thermal Conductivity of  $N_2H_4 - (CH_3)_2N_2H_2$  (50-50) Fuel Blend

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

This propellant composition is within the limits of the present military specification (Mil-P-27402) for the  $N_2H_4-(CH_3)_2N_2H_2$  (50-50) fuel blend and represents a typical propellant grade sample.

Monomethylhydrazine Thermal Conductivity. Subsequent to completing measurements on  $N_2H_4-(CH_3)_2N_2H_2$  (50-50) fuel blend, the thermal conductivity of propellant-grade monomethylhydrazine ( $CH_3N_2H_3$ ) was measured over a nominal temperature range of -50 to 305 F. The results of these measurements are listed in Table 2. Although the same apparatus and experimental technique were employed, additional preparations were necessary prior to conducting actual conductivity measurements.

Because of the lower temperature limit of interest, effort was required in application and operational testing of a refrigeration system capable of cooling the conductivity cell to about -50 F. Successful cooling system checkouts were followed by additional vacuum calibrations of the cell at -50 F and 0 F. Vacuum calibrations of the cell at higher temperatures (50 to 350 F) were completed prior to measurements on the 50-50 fuel blend. In calibration of the apparatus at the lower temperatures, one thermocouple in the cell failed to function normally; however, satisfactory measurements were obtained with eleven thermocouples.

Vacuum calibrations were followed by thermal conductivity determinations on  $CH_3N_2H_3$  (sample A) at approximately -50 and 0 F. During measurements at 0 F, very erratic thermocouple voltage output signals were observed. Measurements were terminated and the cell was disassembled.

In analysis of the cause of the erratic signals, it was found that a small quantity of propellant had leaked past the Teflon seals. Seal failure was probably caused by the repeated temperature cycling of the cell and the cold-flow property that Teflon exhibits. The propellant came into contact with the cell aluminum inner cylinder end face and the electrical heater

CONFIDENTIAL

**CONFIDENTIAL**

AFRPL-TR-66-122

TABLE 2

EXPERIMENTAL RESULTS OF THERMAL CONDUCTIVITY  
MEASUREMENTS ON MONOMETHYLDIAZINE

Sample	Temperature, F	Thermal Conductivity, Btu/hr-ft-F
A*	-30.25	0.130**
A	-30.28	0.134**
B*	0.62	0.148
B	0.61	0.146
B	50.92	0.142
B	50.91	0.144
B	100.58	0.144
B	100.57	0.143
C*	100.51	0.142
C	100.51	0.145
B	150.55	0.131
B	150.54	0.132
C	150.63	0.134
C	150.62	0.136
B	200.81	0.117**
B	200.84	0.117**
C	200.86	0.129
C	200.90	0.133
D*	200.96	0.127
D	200.85	0.130
B	250.77	0.109**
B	250.76	0.108**
C	250.92	0.126
C	250.94	0.125
D	251.02	0.121
D	251.03	0.121

**CONFIDENTIAL**

CONFIDENTIAL

AFRPL-TR-66-122

TABLE 2  
(Concluded)

Sample	Temperature, F	Thermal Conductivity, Btu/hr-ft-F
B	304.89	0.103**
B	304.90	0.104**
C	304.97	0.110
C	304.98	0.108
D	305.09	0.110
D	305.11	0.107

\*Sample Composition:  $\text{CH}_3\text{N}_2\text{H}_3$  - 99.2 weight percent  
 $\text{H}_2\text{O}$  - 0.7 weight percent  
 $\text{NH}_3$  - 0.1 weight percent  
Other soluble impurities, - Trace

\*\*Data discarded; explanation contained in text

CONFIDENTIAL

**CONFIDENTIAL**

AFRPL-TR-66-122

leads located in the same area. Electrical continuity was established between the two components, and resulted in erratic thermocouple voltage signals because the thermocouples were in electrical contact with the inner cylinder.

The heater leads were insulated with an epoxy coating and the cell was reassembled with new seals. Because the cell underwent major repairs, additional vacuum calibrations of the cell were made over the temperature range 0 to 300 F at 50 F intervals. Calibrations of the cell at -30 F were not repeated because of the inability of the cell to maintain a good vacuum at this low temperature.

Results of thermal conductivity measurements on  $\text{CH}_3\text{N}_2\text{H}_3$  at about -30 F were discarded because of an obvious discrepancy in the data (Table 2). This discrepancy was attributed to the previously described cell difficulties, which were observed during measurements on sample A at 0 F. These cell problems had probably occurred previously, but were not readily observable during the -30 F measurements.

Using a second charge of propellant (sample B), measurements were made over the temperature range extending from 0 to 305 F at about 50 F intervals. The values obtained from sample B at 200, 250, and 305 F appeared low; therefore a third propellant charge (sample C) was placed in the cell and data were obtained at about 100, 150, 200, 250 and 305 F. The values obtained with sample C at 200, 250, and 305 F were considerably higher than those obtained with sample B. To resolve this discrepancy in the data, additional data were obtained at 200, 250, and 305 F using sample D: the data agreed favorably with the data obtained with sample C. On this basis, the 200, 250, and 305 F data points obtained with sample B in the cell were discarded. No explanation can be given for the low values, other than possible effects caused by gas bubbles in the propellant annulus (indicating propellant decomposition).

**CONFIDENTIAL**

## CONFIDENTIAL

AFRPL-TR-66-122

The valid data were curve-fitted from 0 to 305 F. The equation which represents the data is:

$$k(\text{Btu/hr-ft-F}) = 0.146 - 1.63 \times 10^{-5} T_{(F)} - 3.39 \times 10^{-7} T_{(F)}^2$$

The multiple error of estimate of the least squares curve-fit is 0.0026. A graphical representation of the data is shown in Fig. 3.

Chemical analysis of the propellant batch used in all measurements indicated the following composition:

$\text{CH}_3\text{N}_2\text{H}_3$  - 99.2 weight percent

$\text{H}_2\text{O}$  - 0.7 weight percent

$\text{NH}_3$  - 0.1 weight percent

Other soluble impurities - Trace

This propellant composition is within the limits of the present military specification (Mil-P-27404) and represents a typical propellant-grade sample.

### Sonic Velocity (and Adiabatic Compressibility) Measurements

Measurements of sonic velocity in inhibited red fuming nitric acid (IRFNA) and in chlorine pentafluoride ( $\text{ClF}_5$ ) were conducted with the apparatus illustrated in Fig. 4.

An interferometer, capable of withstanding pressures to 1000 psia and temperatures to 200 F, was designed and fabricated under Rocketdyne funding. It is constructed of type 317 stainless steel, which is compatible with



CONFIDENTIAL

AFRPL-TR-66-122

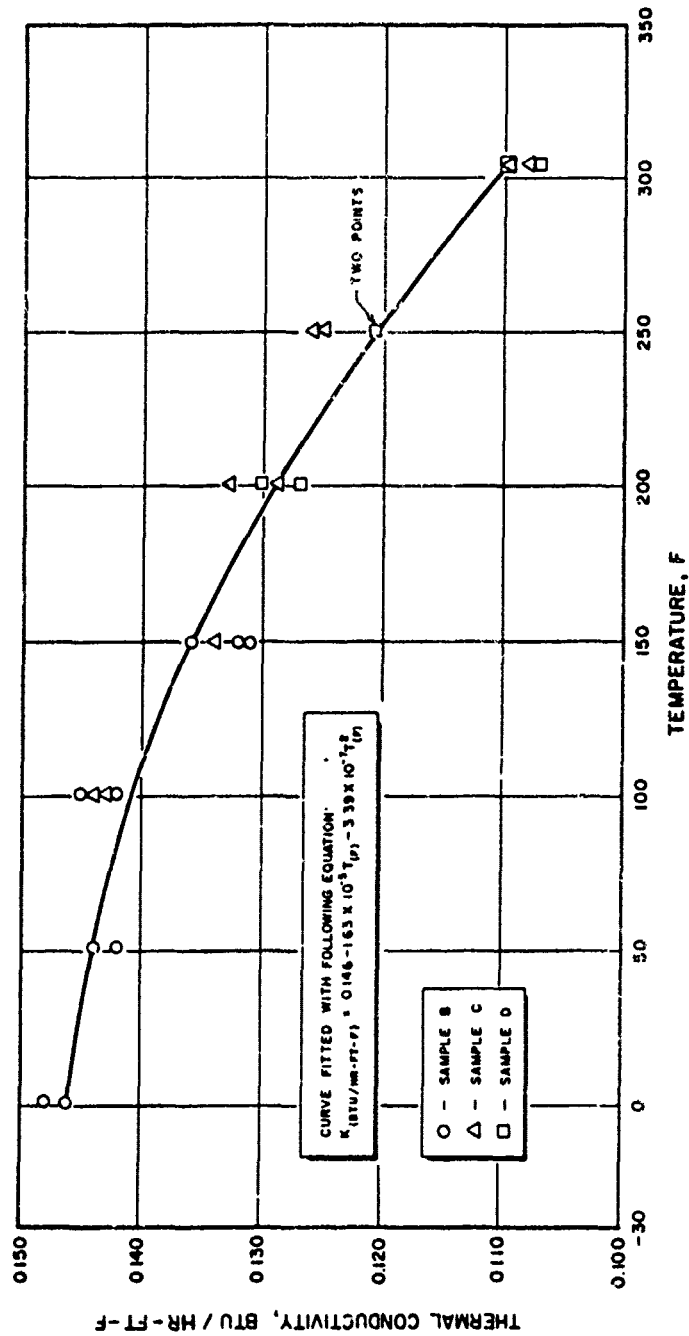


Figure 5. Thermal Conductivity of Monomethylhydrazine

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

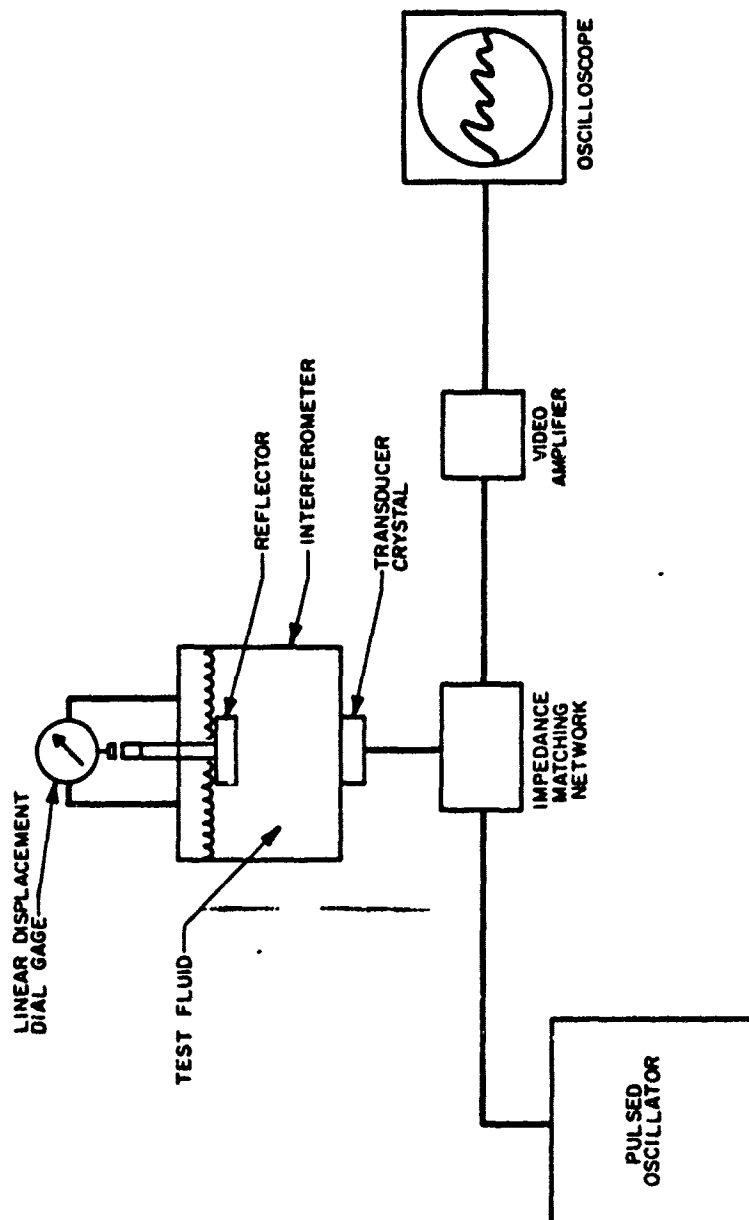


Figure 4 . Sonic Velocity Apparatus

CONFIDENTIAL

**CONFIDENTIAL**

AFRPL-TR-66-122

most propellants of interest. The interferometer is used to measure the distance which sound waves of a known frequency traverse the test fluid. The dial gage serves a dual function: (1) it provides precise linear location data, and (2) it enables differentiation between the reflected signal (and its harmonics) and reflections from the metallic interferometer body. Displayed pips, from true reflections, move on the oscilloscope as the reflector is moved. The spurious signals remain stationary.

Associated electronic equipment consists of a Sperry type 1W style 30R025 Reflectoscope and a Tektronic model 555 oscilloscope. The reflectoscope contains a 5-megacycle pulse-modulated radio frequency source and a video amplifier. A 5-megacycle radio frequency signal is fed simultaneously to the oscilloscope and a quartz piezoelectric crystal (5-megacycle resonant frequency) attached to the bottom of the interferometer. The sound waves, emanating from the crystal, travel through the bottom of the interferometer, through a known distance of test liquid to a reflector, and then back to the crystal. The initial and reflected waves are displayed on the oscilloscope, thus allowing measurement of the time required for the ultrasonic waves to traverse the known distance of test fluid.

The sonic velocity apparatus was calibrated over a temperature range of 0 C (32 F) to 74 C (165 F) at pressures of 14.7, 500, and 1000 psia, using distilled water as the test fluid. The interferometer, filled with test fluid, was immersed in a constant temperature bath and allowed to reach thermal equilibrium at various temperature levels. The equilibrium temperature was then measured using a chromel-alumel thermocouple with a 316 stainless-steel sheath immersed in the test fluid. The data obtained from sonic velocity measurements in water with this apparatus were compared with literature values (Ref. 2 and 3); agreement was within 1.5 percent with a precision of < 1 percent.

26  
**CONFIDENTIAL**

CONFIDENTIAL

AFRPL-TR-66-122

As a demonstration and initial checkout of the corrosion-resistance features of the apparatus, the velocity of sound (1349 m/sec) was measured in a 50 weight percent aqueous HF solution at 25 C (77 F). No malfunction or damage of the apparatus was observed.

Sonic Velocity (and Compressibility) of IRFNA. As an additional checkout of the apparatus, sonic velocity measurements were conducted in propellant-grade (Mil-P-7254E, Type III A) IRFNA at saturated liquid conditions over a temperature range of 3.9 C (39 F) to 26.5 C (80 F). The results of these measurements are shown in Table 3 and Fig. 3.

From these data, the adiabatic compressibilities were calculated using the relationship:

$$\beta_s = \frac{1}{\rho c^2}$$

where

$\beta_s$  = adiabatic compressibility

$\rho$  = density

$c$  = velocity of sound in liquid

The resulting data are also presented in Table 3 and Fig. 3.

Sonic Velocity (and Compressibility) of Chlorine Pentafluoride. The velocity of sound was measured in liquid ClF<sub>5</sub> under saturated conditions over a temperature range of 0 C (32 F) to 77.4 C (164 F). The results of these measurements and related adiabatic compressibilities are shown in Table 3.

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

TABLE 5

EXPERIMENTAL SONIC VELOCITY DATA FOR LIQUID  $\text{ClF}_5$  AND IRFNA\*

Sample	Temperature		Sonic Velocity, m/sec	Compressibility, psi <sup>-1</sup>
	C	F		
IRFNA	7.90	59.02	1428 ±0.5 %	2.154 x 10 <sup>-6</sup>
	8.40	47.12	1406	2.212
	15.15	59.27	1366	2.560
	16.02	60.84	1361	2.581
	26.20	79.16	1322	2.550
	26.50	79.70	1317	2.572
$\text{ClF}_5$	0.00	32.00	712.0	7.317
	8.20	46.76	675.6	8.290
	15.25	59.45	655.4	9.441
	26.10	78.98	576.0	11.75
	32.05	89.69	545.0	15.27
	44.56	112.21	501.8	16.10
	54.65	130.57	472.5	18.61
	66.68	152.02	441.7	22.04
	73.40	164.12	425.0	24.31

\*IRFNA composition meets requirements of propellant specification  
MIL-P-7254E, Type III A

CONFIDENTIAL

CONFIDENTIAL

AFRPP-TR-66-129

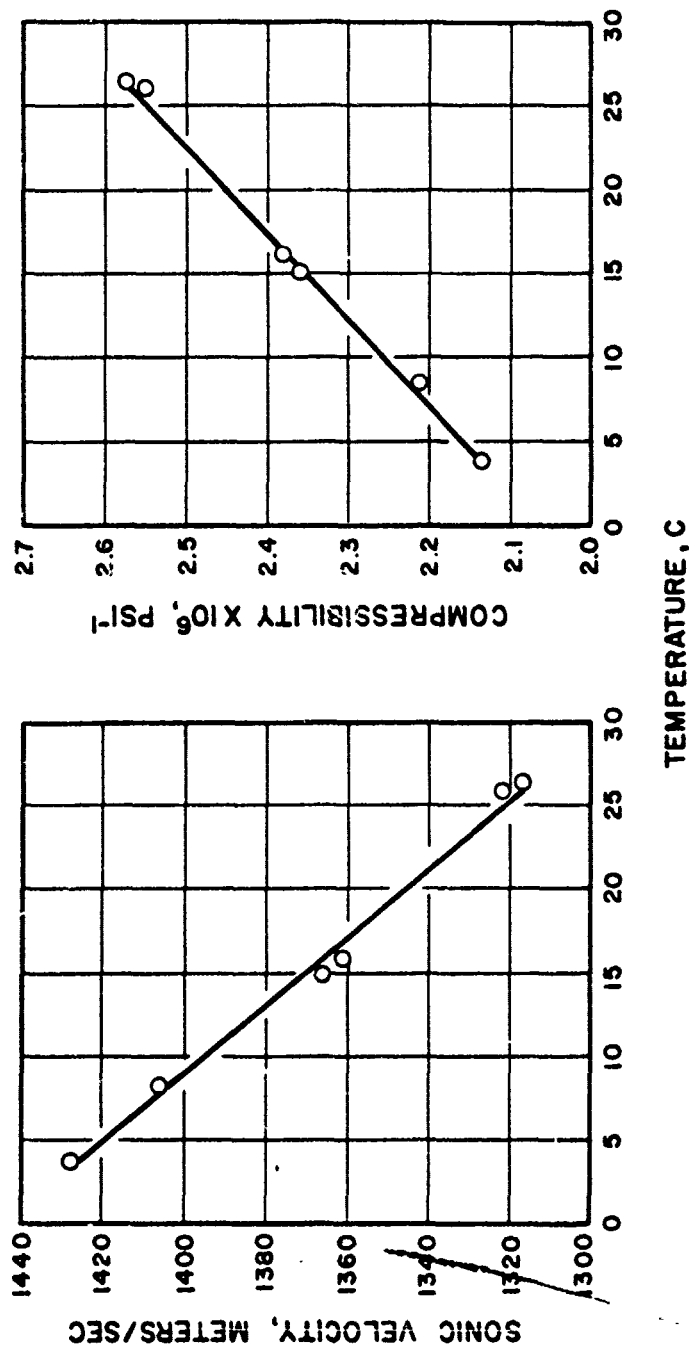


Figure 3. Sonic Velocity and Compressibility of EtNA

CONFIDENTIAL

**CONFIDENTIAL**

ALRPL-TR-66-122

These experimental data were curve-fitted by a least squares computer program, which yielded the following equations:

$$c(\text{m/sec}) = 4.594 \times 10^3 - 2.226 \times 10^1 T(\text{C}) + 2.954 \times 10^{-2} T(\text{C})^2$$

$$\beta_s(\text{psi}^{-1}) = 5.551 \times 10^1 - 4.990 \times 10^{-1} T(\text{C}) + 1.181 \times 10^{-3} T(\text{C})^2$$

The multiple errors of estimate for the sonic velocity and adiabatic compressibility curve-fits are 0.6 percent and 0.9 percent, respectively. The curve-fitted data are represented graphically in Fig. 6.

Sonic velocity data were also obtained at 500 psia ( $\text{GN}_2$  pressurization) over an identical temperature range. As expected, the values obtained were higher than those obtained at ambient pressure. However, corrected values could not be obtained because of erratic behavior of the reflectoscope during additional and more extensive water calibrations at 500 psia.

The malfunction of the reflectoscope, which was traced to a number of defective tubes, precluded measurements of sonic velocities at higher pressures and at lower temperatures during the present program. After replacement of the tubes and apparatus checkout, preliminary recalibration of the apparatus at 14.7, 500, and 1000 psia, over a temperature range of 5 to 60 C yielded a calibration curve with a precision of  $\pm 0.5$  percent.

Posttest chemical analysis of the  $\text{ClF}_3$  sample will be conducted at the conclusion of the  $\text{ClF}_3$  sonic velocity measurements. The pretest analysis indicated a  $\text{ClF}_3$  purity > 99 weight percent.

#### Specific Heat Measurements

Experimental determination of propellant specific heats were conducted in an adiabatic calorimeter developed previously under Contract AF04(611)-9765 (Ref. 1). The calorimeter apparatus consists of four concentric cylindrical

**CONFIDENTIAL**

CONFIDENTIAL

AFMPL-TR-66-122

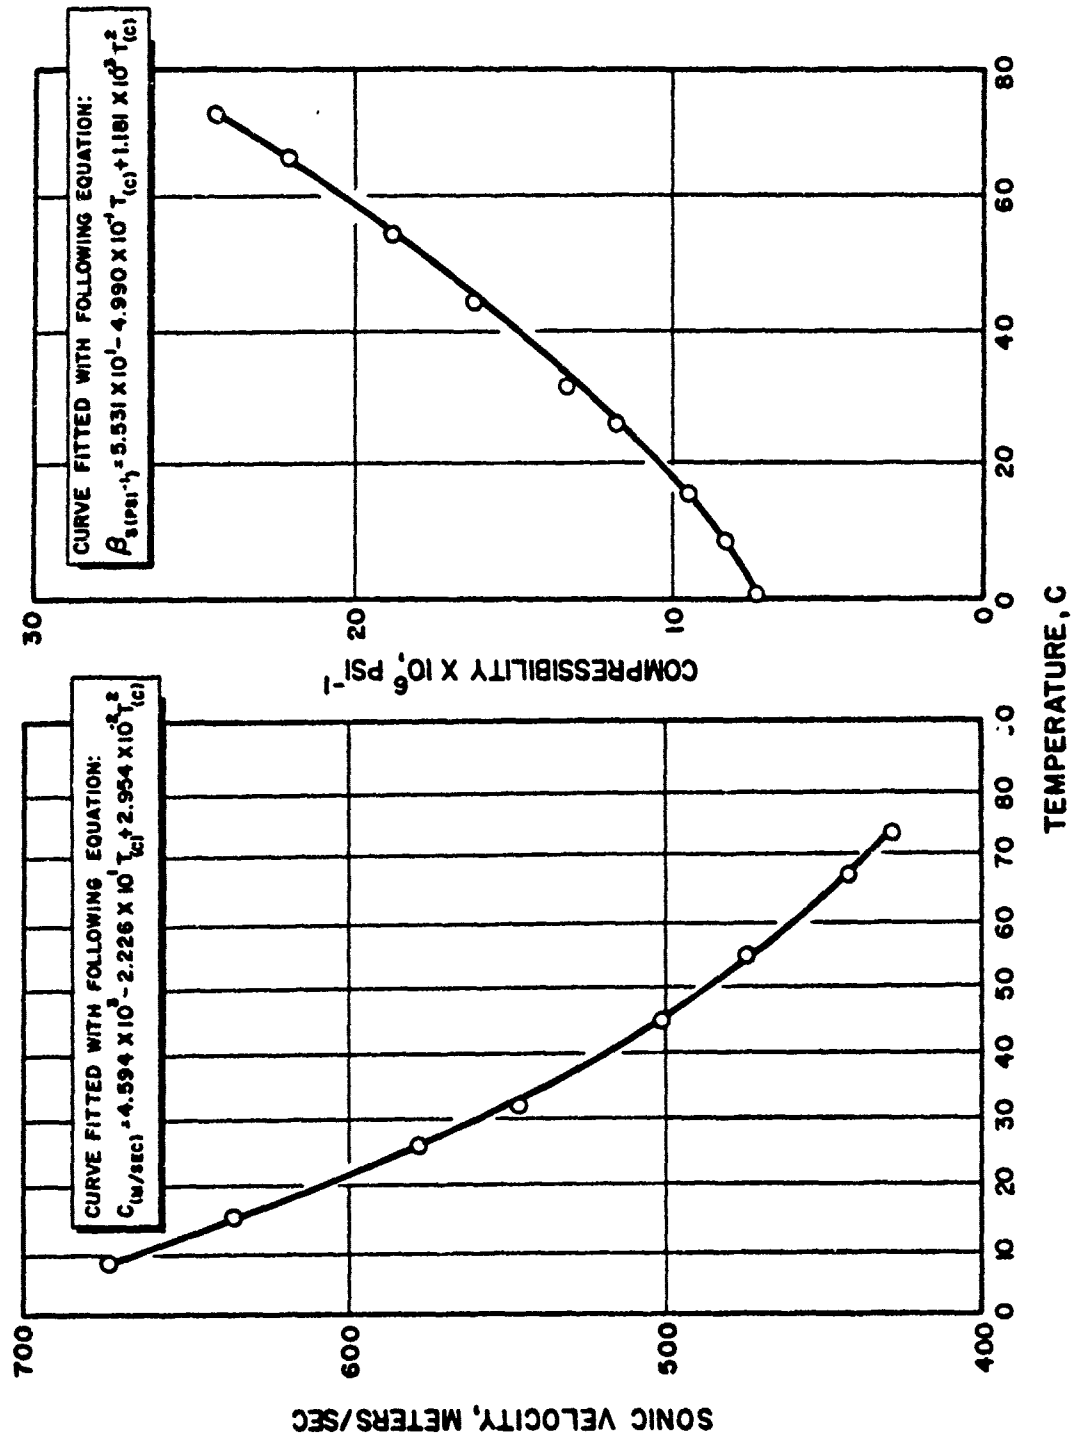


Figure 6. Sonic Velocity and Compressibility of Cl<sub>2</sub>

CONFIDENTIAL



**CONFIDENTIAL**

AFRPL-TR-66-122

containers. The two outer containers are similar in construction to a Dewar vessel with provision for evacuation when desired; the two inner containers are the calorimeter and a surrounding shield, both of which are electrically heated. The calorimeter was initially constructed of copper because of this material's good thermal properties and compatibility with interhalogens. It requires only one change for measurement of additional liquids. A new sample fluid container (the calorimeter) is fabricated and calibrated for each series of measurements. During specific heat measurements on monomethylhydrazine, results of compatibility studies led to the construction of a sample container from an aluminum alloy (6061).

A filling tube with an inside diameter of about 1 millimeter extends from one end of the calorimeter apparatus, and fins of thin copper or aluminum sheet, as required, are fitted inside the apparatus to aid in establishing thermal equilibrium. The calorimeter is nonmagnetically wound with No. 70 B&S gage constantan wire which serves as the heater. The windings are coated with glyptal, then covered with copper foil to reduce the heat leak from radiation. The shield is wound in the same manner as the calorimeter with No. 24 B & S gage constantan. The electrical leads are extended from calorimeter through a hermetically sealed bulkhead fitting. A copper-constantan thermocouple is used for measuring the temperature rise of the calorimeter. The thermocouple leads are extended through a Kovar-to-Pyrex seal and sealed to the glass with Pyseal to avoid any unnecessary junctions. The temperature of the shield is manually controlled to follow that of the calorimeter.

The electrical circuit for energy supply and thermocouple measurements (Fig. 7) consists of the following: (1) a K-5 potentiometer for energy measurement, (2) a second K-5 potentiometer for thermocouple readings, (3) a d-c microvolt amplifier and a recorder which, when used in conjunction with the K-5 potentiometer gives a plot of temperature (emf) vs time, are used to determine the temperature rise of the calorimeter, and (4) a second amplifier which, when used in conjunction with a differential thermocouple between the shield and the calorimeter, indicates the temperature differential between the two surfaces.

32  
**CONFIDENTIAL**

CONFIDENTIAL

AFRPL-TR-66-122

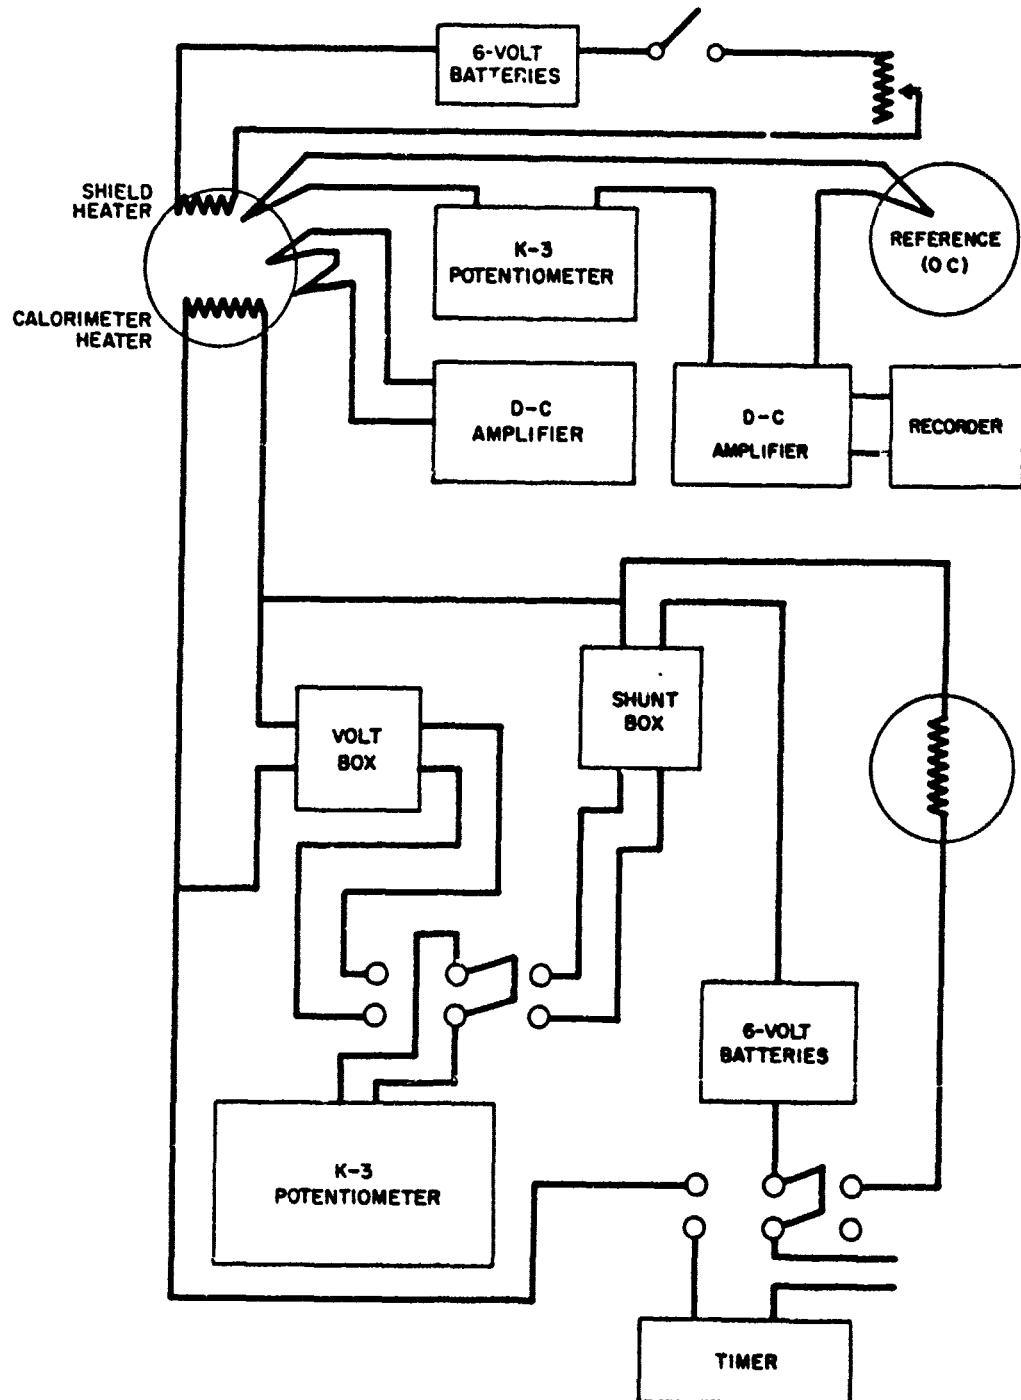


Figure 7. Block Diagram of Circuit Used in Specific Heat Measurements

CONFIDENTIAL

# CONFIDENTIAL

AT&PI-TR-66-122

Under normal conditions, when measurements are being made, the entire space between the calorimeter and outer case is under high vacuum (pressure  $\lesssim 10^{-5}$  mm Hg). Appreciable desorption of gas during an experiment can result in a spuriously high value for the specific heat; therefore, it is necessary that the apparatus initially be thoroughly degassed. This was accomplished by surrounding the apparatus with a water bath held at about 50 C and pumping for 2 days. Cooling below ambient temperature was impractically slow (if dependent on radiation transfer alone); therefore, helium at a few microns pressure was introduced into the calorimeter system to act as the heat transfer medium. When the desired temperature was obtained, the system was again evacuated.

The copper-constantan thermocouple used to measure the temperature rise of the calorimeter (following the input of a known amount of electrical energy) was calibrated at the temperatures of freezing  $\text{CHCl}_3$ , freezing  $\text{CCl}_4$ , and boiling ethanol (reference junction at 0 C). The values obtained were compared with those in the NBS circular 561 (Ref. 4), which contains reference tables for thermocouples, and a plot of electromotive force vs temperature was made.

The amount of electrical energy added to the calorimeter was calculated from the equation:

$$H = i^2 R t$$

where

H = electrical energy, joules

i = current

R =  $E/i$

t = time, seconds

CONFIDENTIAL

AFRPL-TR-66-122

The specific heat ( $C_s$ ) was then derived from the measured change in temperature caused by this addition of electrical energy:

$$C_s = [ (H/\Delta T)_{\text{sample}} - H_c ] / \text{wt sample}$$

where

$\Delta T$  = temperature rise (C) determined from a plot of temperature vs time by extrapolating to the midpoint of the heating curve

$H_c$  = calorimeter constant

Apparatus Calibration. The specific heat data obtained from measurements on chlorine trifluoride and monomethylhydrazine indicated that the calorimeter system was giving high results (in comparison to those from earlier experimental efforts by others at lower temperatures). For this reason, the electrical circuit was thoroughly rechecked and measurements were made on a liquid whose heat capacity is accurately known over the temperature range of interest. A copper calorimeter was constructed, wound with resistance wire, and calibrated (empty) at temperatures from 0 to 80 C. This is the same procedure used for the measurements on  $\text{ClF}_3$  and  $\text{CH}_3\text{N}_2\text{H}_3$ .

The calorimeter was then filled in a dry box with 7.28 grams of spectrograde methanol whose water content was found to be 0.08 percent by a Karl Fisher analysis and confirmed by the determination of the critical solution temperature of a 2:1 mixture of n-hexane and methanol. Data obtained from specific heat measurements on methanol over a temperature range of 0 to 40 C were somewhat high when compared with the previously reported values at comparable temperatures (Ref. 5).

Further investigation revealed that when the two amplifiers in the system were interconnected, one amplifier would load the other, cause an error in

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

the emf reading, and an error in the emf vs time curve was recorded. One amplifier is used to monitor the temperature differential between the calorimeter and the shield. The second amplifier amplifies output of the thermocouple which measures the temperature rise of the calorimeter; this amplified signal is then fed into a recorder from which the emf vs time curve is obtained. Thus, the thermocouple connections to the calorimeter allow the amplifiers to interact. This error, which was linear over the emf range and did not change with temperature, resulted in an 11 percent correction to  $\Delta T$ . The voltage reading was also found to be in error by 10 to 11 percent.

Corrections to the experimental methanol data resulted in values within 5 percent of the reported values. The corrections for these errors were also applied to the experimental  $\text{ClF}_3$  and  $\text{CH}_3\text{N}_2\text{H}_3$  data. Suitable modifications are being made in the calorimeter system to eliminate such errors in the future.

Specific Heat of Chlorine Trifluoride. The specific heat of  $\text{ClF}_3$  was measured over a temperature range of  $-10$  ( $14^\circ\text{F}$ ) to  $70^\circ\text{C}$  ( $158^\circ\text{F}$ ). These data extended existing  $\text{ClF}_3$  specific heat data (Ref. 6) over a wider temperature range.

After obtaining a vacuum  $< 1 \times 10^{-5}$  mm Hg in the calorimeter system, calibration measurements on the empty calorimeter were made from about  $0$  to  $70^\circ\text{C}$ . After passivation, 11.62 grams of propellant-grade  $\text{ClF}_3$  was condensed into the calorimeter from a vacuum line, and the filling tube was crimped and sealed with soft solder. The results are reported as  $C_g$ , which is the specific heat of a liquid under its own vapor pressure, since neither the volume nor the pressure was held constant. In the measurement of the liquid specific heat at saturated conditions, a two-phase system is present in the calorimeter. If the quantity of vapor, which changes in volume (and density) as the temperature is changed, is significant, it is necessary to apply a

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

vapor correction to the specific heat data. The size of this correction varies with the degree of filling of the calorimeter. Treating the problem from an entropy standpoint, the corrected specific heat can be calculated from the following equations:

$$C_s = [C_{\text{net}} - T \left( \frac{dS'}{dT} \right)] / M$$

and

$$S' = \frac{dP}{dT} (V - Mv_c)$$

where

$S'$  = excess entropy of a system, as compared with the same mass of saturated condensed phase

$T$  = absolute temperature of calorimeter and contents

$M$  = mass of material contained in calorimeter

$V$  = volume of the calorimeter

$v_c$  = volume per unit mass of condensed phase

$P$  = pressure (equal to vapor pressure of material at temperature  $T$ )

A vapor correction was applied to the  $\text{ClF}_3$  data because the volume of the vapor phase was significant. (The size of the correction ranged up to 2 percent of the specific heat at 70 C.) The corrected experimental data are given in Table 4. These data also include all corrections resulting from the methanol calibrations. In addition, a correction of 0.7 percent was applied to the observed current to account for that portion of current which passed through the volt box (Fig. 7). This correction was calculated from the relationship:

$$I_{\text{meas.}} = I_{\text{calc.}} + I_{\text{VB}} = I_{\text{calc.}} + \frac{V}{R_{\text{VB}}}$$

$$R_{\text{VB}} = 11250 \text{ ohms}$$

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

TABLE 4

EXPERIMENTAL SPECIFIC HEAT DATA FOR  $\text{ClF}_3$ \*

Average Temperature, C	$C_{\text{sat}}$ , cal/g-C	Average Temperature, C	$C_{\text{sat}}$ , cal/g-C
-9.8	0.249	28.4	0.282
-4.8	0.255	30.6	0.284
0.2	0.258	36.7	0.288
5.4	0.262	40.6	0.291
10.4	0.269	46.8	0.295
15.5	0.272	50.5	0.299
15.6	0.275	50.5	0.299
18.6	0.275	55.7	0.302
20.7	0.275	60.6	0.307
27.2	0.279	65.7	0.310
		70.6	0.314

\*Sample composition (after measurements):  $\text{ClF}_3$ , 99.8+ weight percent;  
 $\text{F}_2$ , < 0.05 weight percent;  
 $\text{ClF}$ , < 0.05 weight percent;  
 $\text{Cl}_2$ , < 0.01 weight percent;  
 $\text{ClO}_2$ , < 0.05 weight percent

CONFIDENTIAL

CONFIDENTIAL

AFRPI-TR-66-122

The accuracy, determined by estimating (1) the effect of errors introduced from measurement of time and temperature, and (2) errors resulting from the large corrections that had to be made to the voltage and  $\Delta T$  values, is about  $\pm 5$  percent. The precision is about 0.5 percent. By curve-fit of the experimental specific heat data, the following mathematical expression for the relationship between specific heat and temperature was obtained:

$$C_s(\text{cal. gm-K}) = -0.8946 + 0.9815 \times 10^{-2} T_{(K)} - 0.2881 \times 10^{-4} T_{(K)}^2 + 0.5050 \times 10^{-7} T_{(K)}^3$$

Agreement between the experimental curve and the calculated values is better than 0.4 percent. The graphical presentation of the curve-fitted data and representative experimental points is shown in Fig. 8. The specific heat values obtained are somewhat lower than extrapolation of the values reported previously (Ref. 6) at lower temperatures. Differences in the slopes of the plot of  $C_s$  vs temperature vary by a factor of 3 to 4. The difference in these data cannot be explained because absolute measurements of energy were made in both studies.

Chemical analysis of the  $\text{ClF}_3$  sample used in the specific heat measurements indicated the following composition:

$\text{ClF}_3$  - 99.8 weight percent

$\text{F}_2$  - < 0.05 weight percent

$\text{ClF}$  - < 0.05 weight percent

$\text{Cl}_2$  - < 0.01 weight percent

$\text{ClO}_2$  - < 0.05 weight percent

CONFIDENTIAL



CONFIDENTIAL

AFIP-L-TR-66-122

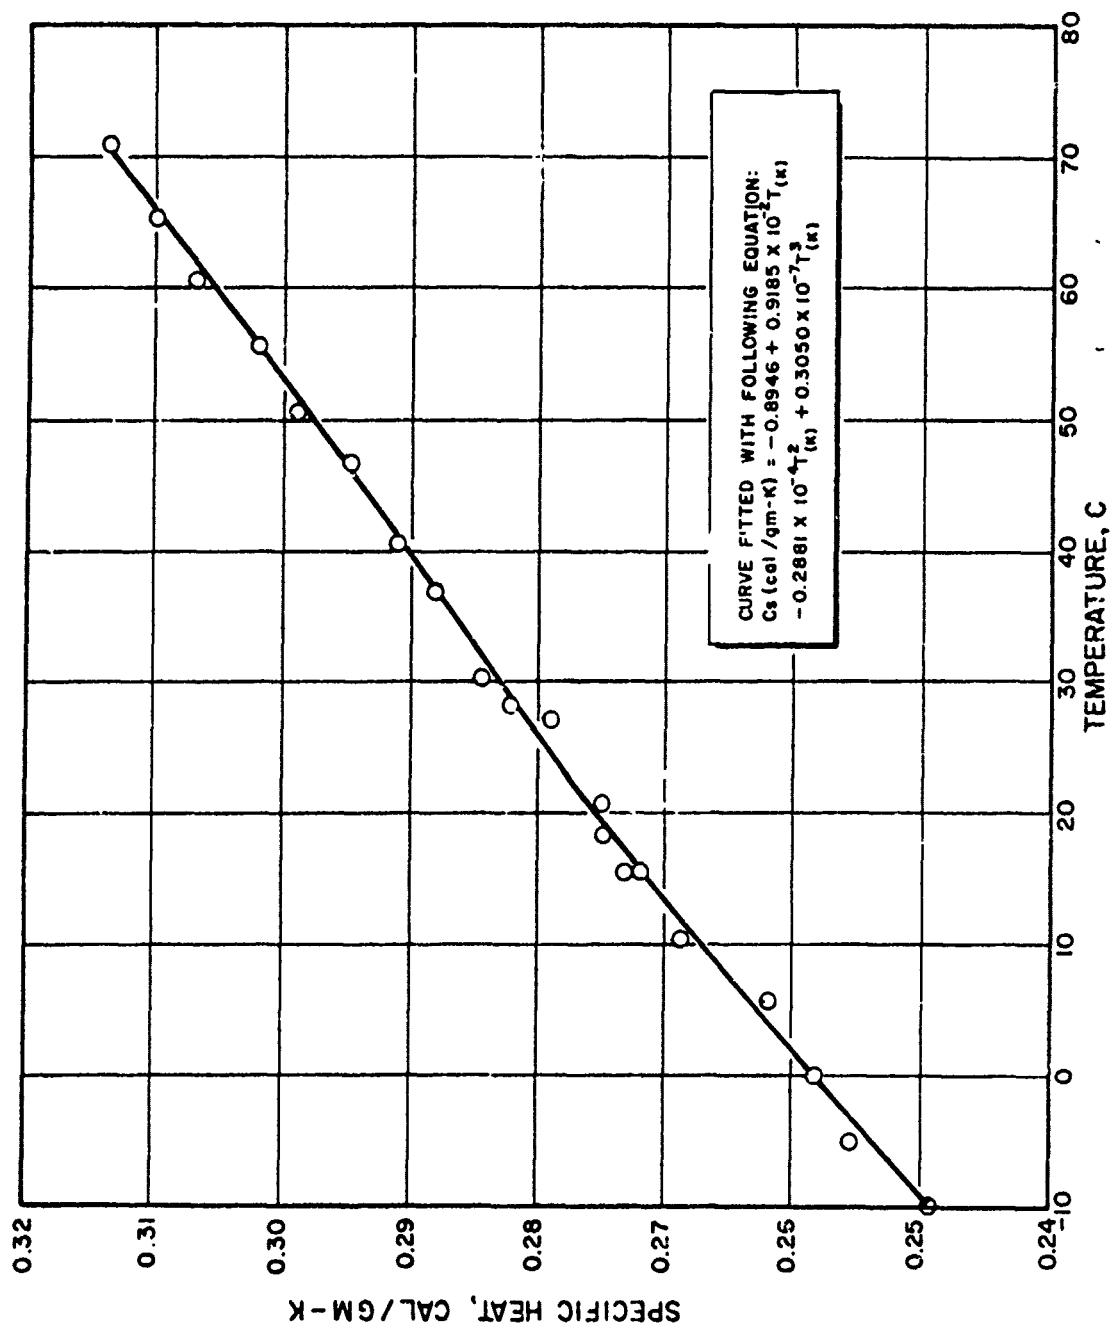


Figure 8. Specific Heat of Chlorine Trifluoride

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

Specific Heat of Monomethylhydrazine. Specific heat measurements were completed on  $\text{CH}_3\text{N}_2\text{H}_3$  over the temperature range of about 20 C (68 F) to 120 C (248 F). These data extend the existing  $\text{CH}_3\text{N}_2\text{H}_3$  specific heat values reported by Astin, Fink, Janz, and Russell (Ref. 7). The latter reported heat capacity values for  $\text{CH}_3\text{N}_2\text{H}_3$  from 15K (-433 F) to 298.16 K (77 F).

The entire calorimeter system was evacuated. After outgassing, a vacuum in the  $10^{-5}$  to  $10^{-6}$  mm Hg range was maintained while the calorimeter was calibrated from ~ 25 to 120 C. Because of the low mass of the aluminum calorimeter, the energy input period (to cause a temperature rise of 1 C in the empty calorimeter) was less than 40 seconds. This low heating period results in an appreciable error in the time measurement; therefore, sufficient resistance was added in the electrical circuit (for heat input) to increase the heating period to about 75 seconds.

The  $\text{CH}_3\text{N}_2\text{H}_3$  (7.85 grams) was loaded into the calorimeter in a dry box, and the filling tube was crimped and sealed with solder. Because of the difficulties involved in soldering aluminum, a special solder and flux were used and the tube was soldered in the nitrogen atmosphere of the dry box. Although it was assumed that crimping the filling tube sealed the calorimeter, the tip was soldered as an added precaution against leaks.

The corrected results from the  $\text{CH}_3\text{N}_2\text{H}_3$  specific heat measurements are reported in Table 5. Since the volume of the vapor phase was small it was not necessary to apply the vapor correction. However, the current, voltage, and  $\Delta T$  corrections were made in the same manner as for  $\text{ClF}_3$ . The accuracy of these data is estimated to be about  $\pm 3$  percent. This was determined largely from the estimated accuracy with which corrections could be applied to the voltage and  $\Delta T$  readings. The precision is much better.

The data were curve-fitted and the following mathematical expression for the relationship between specific heat and temperature was obtained:

$$C_{s(\text{cal/gm-K})} = -0.7458 + 0.1132 \times 10^{-1} T_{(\text{K})} - 0.2963 \times 10^{-4} T_{(\text{K})}^2 + 0.2648 \times 10^{-7} T_{(\text{K})}^3$$

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

TABLE 5

SPECIFIC HEAT DATA FOR  $\text{CH}_3\text{N}_2\text{H}_5^*$

Average Temperature, C	$C_{\text{sat}}$ , cal/g-C,	Average Temperature, C	$C_{\text{sat}}$ , cal/g-C
21.1	0.689	40.8	0.711
22.2	0.694	59.0	0.716
25.4	0.700	64.9	0.715
24.6	0.697	68.5	0.719
25.7	0.699	75.5	0.722
25.7	0.698	80.5	0.722
26.9	0.701	85.4	0.724
27.8	0.703	100.8	0.732
32.6	0.698	104.4	0.728
39.5	0.704	114.9	0.736
44.8	0.716	125.9	0.755

\*Sample composition: 99.6 weight percent  $\text{CH}_3\text{N}_2\text{H}_5$ ;

0.1 weight percent MMA;

0.2 weight percent other soluble impurities;

trace percent  $\text{NH}_3$

CONFIDENTIAL

CONFIDENTIAL

AFRPI-TR-66-122

The agreement between the experimental and curve-fitted values (multiple error of estimate), which is greater than 0.8 percent, is shown in Fig. 9.

Chemical analysis of the  $\text{CH}_3\text{N}_2\text{H}_3$  sample indicated a composition of:

$\text{CH}_3\text{N}_2\text{H}_3$  - 99.6 weight percent

Monomethylamine - 0.1 weight percent

$\text{NH}_3$  - trace

Other soluble impurities - 0.2 weight percent

Specific Heat of  $\text{ClF}_3$ . The specific heat values previously obtained and reported for  $\text{ClF}_3$  under contract AF04(611)-9565 (Ref. 1), were corrected as a result of the methanol calibrations for a ~ 10 percent error in the voltage reading and a 0.7 percent error in the current reading. The  $\Delta T$  values obtained during these previous measurements on  $\text{ClF}_3$  were not in error since only one amplifier was used in the earlier measurement circuit.

The corrected values of  $C_p$  for  $\text{ClF}_3$  are reported in Table 6. The accuracy of the data is estimated to be about  $\pm 5$  percent. A curve fit of the experimental data gives the following expression:

$$C_p(\text{cal/gm-K}) = 1.0847 - 0.9522 \times 10^{-2} T(\text{K}) + 0.3595 \times 10^{-4} T(\text{K})^2 - 0.4509 \times 10^{-7} T(\text{K})^3$$

This curve-fit and representative experimental points were shown in Fig. 10. Agreement between the experimental and calculated values is better than 0.5 percent

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

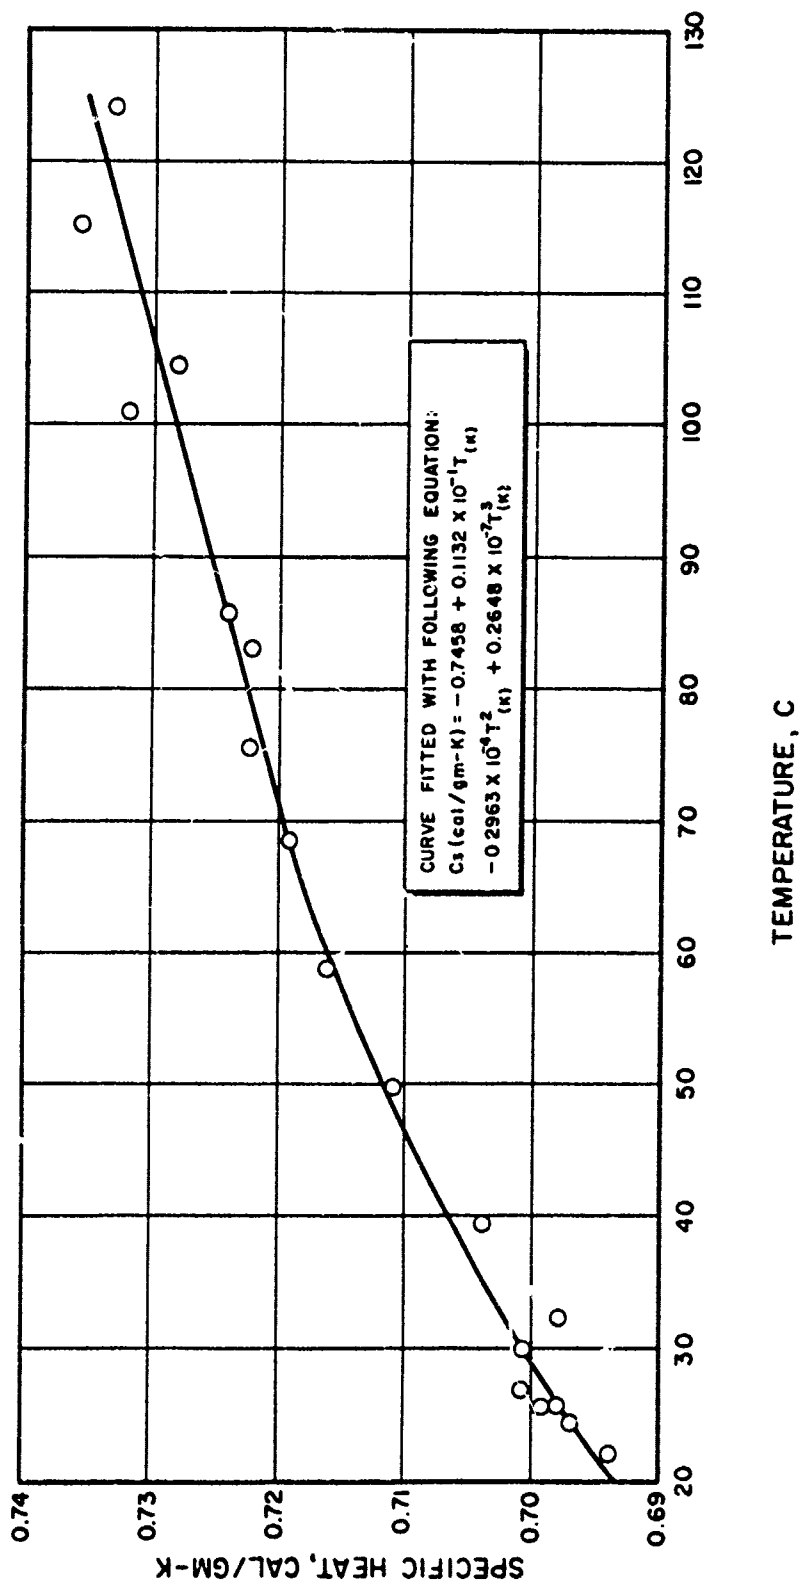


Figure 9. Specific Heat of Monomethylhydrazine

CONFIDENTIAL

CONFIDENTIAL

AFPPD-TR-66-122

TABLE 6  
SPECIFIC HEAT OF  $\text{ClF}_5$ \*

Run No.	Average Temperature, C	$C_s$ , cal/gm-K
1a	6.92	0.292
	9.08	0.293
	11.67	0.295
	14.84	0.296
	18.01	0.296
	21.07	0.298
	23.91	0.298
	27.64	0.300
	29.59	0.301
	31.85	0.302
1b	4.76	0.291
	7.46	0.292
	10.16	0.294
	12.82	0.295
	15.56	0.296
	17.63	0.297
	20.57	0.298
	23.10	0.298
	25.79	0.300
	28.53	0.301
	31.05	0.302
	33.70	0.303
	36.54	0.304
	42.53	0.306
	44.99	0.307
	47.66	0.308

\*Sample composition: Pretest, > 99 weight percent  $\text{ClF}_5$ , < 0.05 weight percent  $\text{F}_2$ , < 0.05 weight percent  $\text{ClF}$ , 0.3 weight percent  $\text{ClF}_3$ , 0.5 weight percent  $\text{HF}$ ; Posttest, > 99 weight percent  $\text{ClF}_5$ , 0.3 weight percent  $\text{O}_2$ , < 0.3 weight percent  $\text{ClF}_3$ , < 0.1 weight percent  $\text{SF}_6$ , 0.1 weight percent  $\text{F}_2 + \text{CF}_4 + \text{N}_2$  ( $\text{N}_2$  contamination occurred during transfer for analysis.)

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

TABLE 6  
(Concluded)

Run No.	Average Temperature, C	C <sub>g</sub> , cal./gm-K
2a ↓	-47.44	0.271
	-44.36	0.272
	-38.05	0.273
	-34.98	0.274
	-31.90	0.275
	-28.95	0.276
	-25.93	0.277
	-22.92	0.278
	-19.97	0.279
	-16.92	0.280
	-13.91	0.281
	-10.90	0.285
	-7.94	0.284
	-4.95	0.285
	-2.09	0.286
	+0.712	0.288
2b ↓	-44.01	0.272
	-40.83	0.275
	-37.75	0.274
	-34.68	0.275
	-31.58	0.276
	-28.47	0.277
	-22.14	0.278
	-19.20	0.279
	-16.05	0.281
	-13.16	0.282
	-10.25	0.285
	-7.54	0.285
	-4.38	0.286
	+0.101	0.287

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TN-66-122

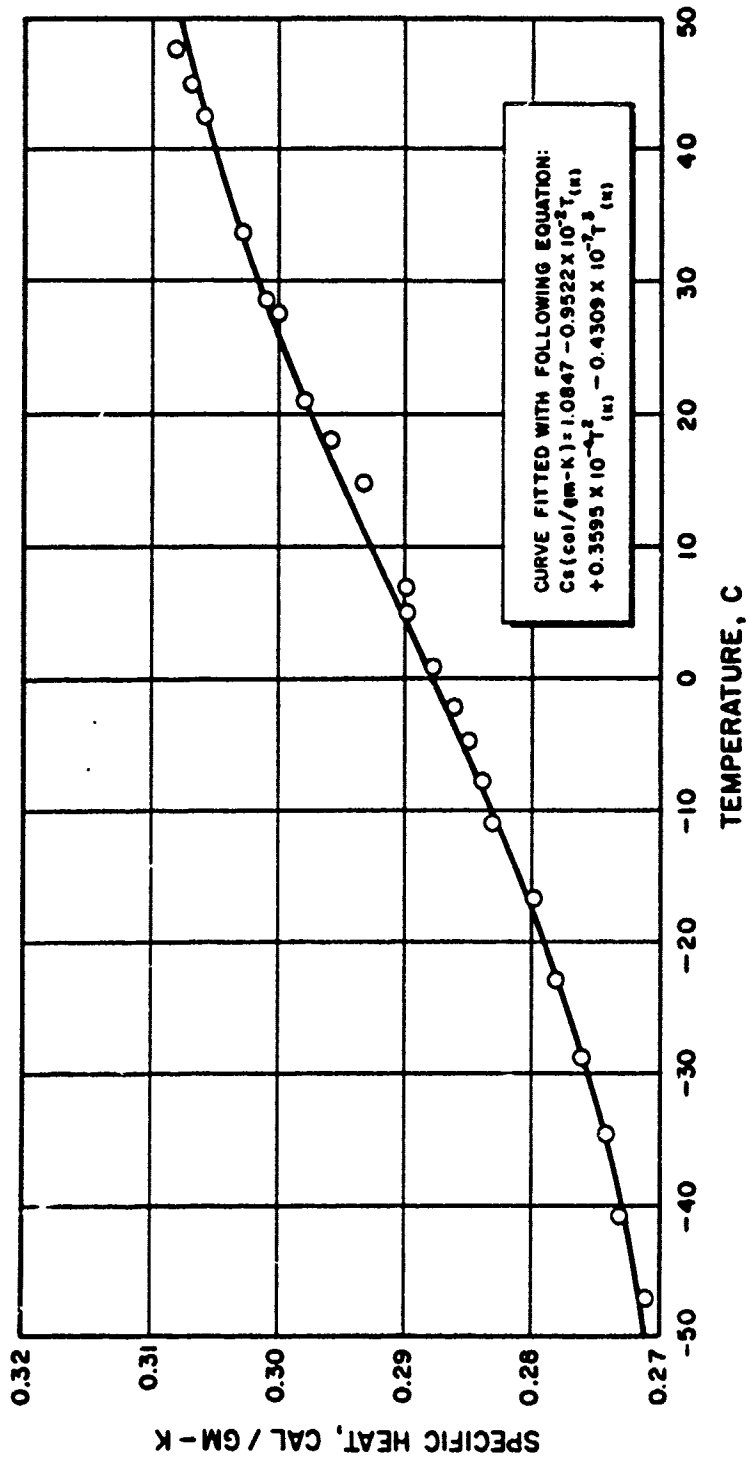


Figure 10. Specific Heat of Chlorine Pentafluoride

CONFIDENTIAL



CONFIDENTIAL

AFRPL-TR-66-122

Density and Vapor-Liquid Relationship Measurements

The saturated liquid density of  $\text{ClF}_3$  was measured over a temperature range of 0 C (32 F) to 177 C (351 F) using the variable volume apparatus illustrated in Fig. 11. These data extend the existing data of Banks and Rudge (Ref. 8 ) to the critical temperature. The apparatus, described by Poole and Nyberg (Ref. 9 ), is constructed entirely of 300 series stainless steel and is capable of withstanding pressures up to 1500 psi, well in excess of the critical pressure of  $\text{ClF}_3$ . The variable volume capability provided by the stainless-steel bellows permits density measurements over a range of temperatures without reloading.

The densimeter operates on the principle that a sudden rise in pressure will be sensed by the transducer and that upon mechanical reduction of the volume of the cavity containing the liquid  $\text{ClF}_3$  in equilibrium with its vapor, all vapor is forced to condense. The volume of the contained liquid at this point is indicated by the micrometer attached to the bellows. Because the weight of contained liquid is known and the volume is known by prior calibration of the micrometer with degassed water, the density can be calculated.

After condensing a known amount of  $\text{ClF}_3$  into the evacuated sample cavity, the densimeter was placed in a constant-temperature environment and allowed to reach thermal equilibrium at selected and regulated temperatures. The constant-temperature environment of the apparatus was maintained by placing it in a Fisher Isotemp oven (thermostated to  $\pm 0.5$  C of any desired set point).

Upon attaining thermal equilibrium, a slight pressure was applied to the back of the bellows with gaseous nitrogen. The bellows was expanded by turning the micrometer knob until a rapid rise in pressure was observed by the pressure transducer readout system. This indicated that all  $\text{ClF}_3$

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

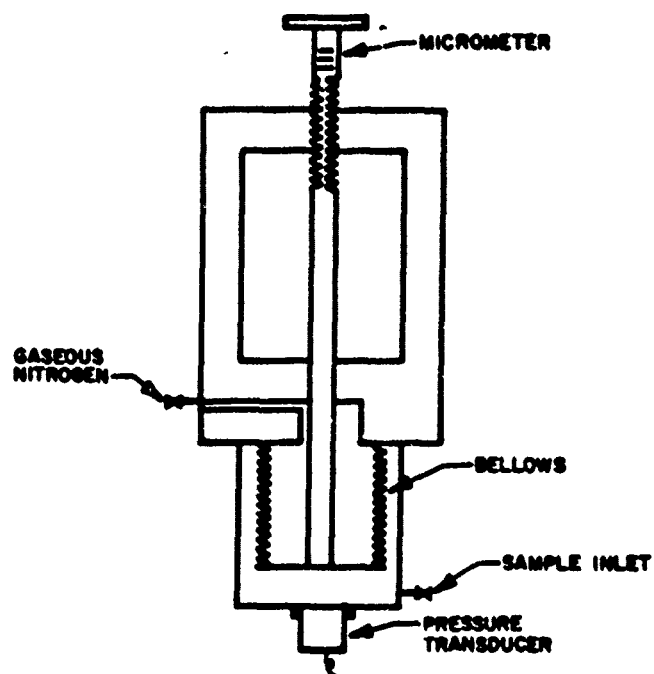


Figure 11. Poole-Nyberg Densimeter

CONFIDENTIAL

**CONFIDENTIAL**

ARPL-7-59-122

vapor had been condensed and that the volume of the sample cavity at that point represented the volume occupied by liquid  $\text{CH}_3$ . The bellows was contracted and the procedure repeated several times at each temperature level. The volume of the sample cavity was ascertained by relating the micrometer setting to the calibration curve. All apparatus manipulations were made remotely without opening the oven.

The temperature and pressure readout equipment, which was used previously for vapor pressure and critical temperature measurements, was based on the use of a Leeds & Northrup student potentiometer. Two power supplies were built to replace the standard cell and working cell used with the potentiometer.

A reference voltage supply was designed with sufficient preregulation, both with respect to input voltage and to temperature, to ensure a constant current to a reference diode. The reference diode does not drift more than 0.001 percent per degree C in output voltage. A voltage divider was used to bring the voltage level to that which would be measured by the Leeds & Northrup potentiometer.

The constant-current supply, used in place of the working cell, was adjusted by a variable resistor. Fine adjustment was provided by external variable resistors in parallel with the output.

Two transducer power sources were combined in the same supply. One source was designed to supply about 28 volts with minimal regulation because the Micro Systems driver, used with the Micro Systems transducer, supplied additional regulation. The other source was a regulated and temperature-compensated supply of nearly 7 volts required by Statham transducers. The equilibrium temperature of the sample was recorded to  $\pm 0.05^\circ\text{C}$  by a chromel-alumel thermocouple taped to the outside of the densimeter.

**CONFIDENTIAL**

**CONFIDENTIAL**

AFRPL-TR-66-122

The vapor pressure of  $\text{ClF}_3$  was measured over the temperature range of 55 C (95 F) to 180 C (356 F) using a constant volume bomb. The vapor pressure apparatus consisted of a 10-milliliter, 500 series stainless-steel cylinder with an immersion thermocouple, pressure transducer, and sample valve attached. The immersion thermocouple (Temptron No. 2092) had a chromel-alumel junction and a 316 stainless-steel sheath. The thermocouple was sealed into the 10-milliliter cylinder, permitting direct measurement of the temperatures of the cylinder contents. The thermocouple was calibrated at the melting point and boiling point of water. A 1000 psig Statham pressure transducer was connected to the cylinder to measure pressure. The pressure transducer was calibrated with a Heise gage to corroborate the calibration factors reported by the manufacturer. The readout system described in the previous discussion of the densimeter was used to meet the readout requirements of the thermocouple and pressure transducer.

A sufficient amount of  $\text{ClF}_3$  was loaded into the vapor pressure apparatus to ensure the presence of some liquid at all times over the range considered. The bomb and contents were allowed to reach thermal equilibrium at selected temperatures, and the equilibrium vapor pressures were recorded. Constant temperatures above 55 C were obtained by placing the entire apparatus in a Fisher isotherm oven.

During company-sponsored effort immediately prior to the program, the critical temperature of  $\text{ClF}_3$  was measured in an apparatus of the type described by Ambrose and Grant (Ref. 10). This method determines the critical temperature by the disappearance and reappearance of the liquid-vapor meniscus as the temperature of the liquid sample contained in a sealed quartz capillary is raised and lowered through the critical point.

In the meniscus method, a 5-centimeter quartz capillary with a 2-millimeter inside diameter and an 8-millimeter outside diameter was heated while under vacuum to ensure dryness. It was then passivated with small amounts of  $\text{ClF}_3$  vapor in successive steps until passivation was complete. The capillary

**CONFIDENTIAL**

CONFIDENTIAL

AFRPL-TR-66-122

was then filled to one third of its volume with liquid  $\text{ClF}_3$ . After heat sealing, the capillary was placed in a furnace preheated to 125 C. The furnace consisted of an electrically heated aluminum block insulated with fire brick and bored and slotted for reception and observation of the quartz capillaries. Temperatures were measured by a chromel-alumel thermocouple located near the meniscus. The temperature was increased at the rate of 0.2 C per minute until the meniscus disappeared. The temperature was then decreased until the meniscus reappeared.

Density of Chlorine Trifluoride. With the variable volume capabilities of the Poole-Nyberg densimeter, it was possible to conduct measurements of  $\text{ClF}_3$  over the temperature range of 0 C (32 F) to 177 C (351 F) with four fillings of the apparatus. Three runs were also conducted with the constant volume vapor pressure apparatus in an attempt to determine the critical density. The experimental points obtained from the densimeter and one of the constant volume measurements are given in Table 7 and Fig. 12; the experimental data of Banks and Rudge who determined the density of  $\text{ClF}_3$  to 45 C (113 F) are included for comparison. Data from the other two density measurements in the constant volume bomb are still being reduced.

The density data over the temperature range of -4 C (25 F) to 161 C (322 F) were curve-fitted by a least-squares computer program, which resulted in the following equation:

$$\rho(\text{g/cc}) = 5.433 - 2.955 \times 10^{-2} T_{(\text{K})} + 8.625 \times 10^{-5} T_{(\text{K})}^2 - 9.374 \times 10^{-8} T_{(\text{K})}^3$$

The multiple error of estimate for this equation is 0.3 percent. Because the density/temperature relationship of  $\text{ClF}_3$  changes rapidly above 160 C, the data obtained above 161 C were omitted so that the data could be expressed with a reasonable equation.

CONFIDENTIAL

CONFIDENTIAL

AFRPT-TU-66-122

TABLE 7

EXPERIMENTAL DENSITY DATA FOR LIQUID  $\text{ClF}_3$

Run Number	Temperature, C	Observed Density, gm/cc	Calculated Density, gm/cc	$\Delta \rho \times 10^{-3}$ gm/cc
A*	-4.07	1.8969	1.901	-4
4	0.00	1.884	1.887	-3
A	1.70	1.8805	1.881	-1
A	9.64	1.8565	1.855	2
A	12.68	1.8475	1.845	3
A	20.92	1.8217	1.819	3
4	23.10	1.816	1.812	4
A	26.90	1.8030	1.800	3
A	38.71	1.7655	1.764	1
1	42.98	1.747	1.750	-3
A	45.63	1.7430	1.742	1
4	52.28	1.725	1.721	2
1	62.13	1.684	1.689	-5
3	69.68	1.665	1.665	0
1	74.93	1.658	1.645	-7
1	80.75	1.618	1.624	-6
1	91.35	1.576	1.582	-6
3	96.40	1.572	1.562	10
1	108.38	1.508	1.509	-1
3	115.08	1.486	1.476	10
2	121.96	1.430	1.441	-11
1	124.50	1.434	1.427	7
2	133.08	1.376	1.379	-3
2	144.85	1.312	1.306	6

A\* Banks and Rodge's data (Ref. 8)

Sample Analysis: > 99.5 weight percent  $\text{ClF}_3$ , < 0.1 weight percent  $\text{ClF}$ , < 0.01 weight percent  $\text{Cl}_2$ , < 0.02 weight percent  $\text{F}_2$ , < 0.01 weight percent  $\text{ClO}_2$ , 0.4 weight percent HF

CONFIDENTIAL

**CONFIDENTIAL**

AFRPL-TR-66-122

TABLE 7  
(Concluded)

Run Number	Temperature,	Observed Density, gm/cc	Calculated Density, gm/cc	$\Delta \rho \times 10^{-3}$ gm/cc
2	150.53	1.269	1.267	2
2	161.18	1.184	1.190	-6
3	171.38	1.104		
3	177.15	0.957		
B*	179.60	0.860		

B\* Data from vapor pressure apparatus

Sample analysis: > 99.5 weight percent  $\text{ClF}_3$   
< 0.03 weight percent  $\text{ClF}$   
< 0.01 weight percent  $\text{Cl}_2$   
< 0.02 weight percent  $\text{F}_2$   
< 0.01 weight percent  $\text{ClO}_2$   
0.4 weight percent HF

**CONFIDENTIAL**

CONFIDENTIAL

AFRPL-TR-66-122

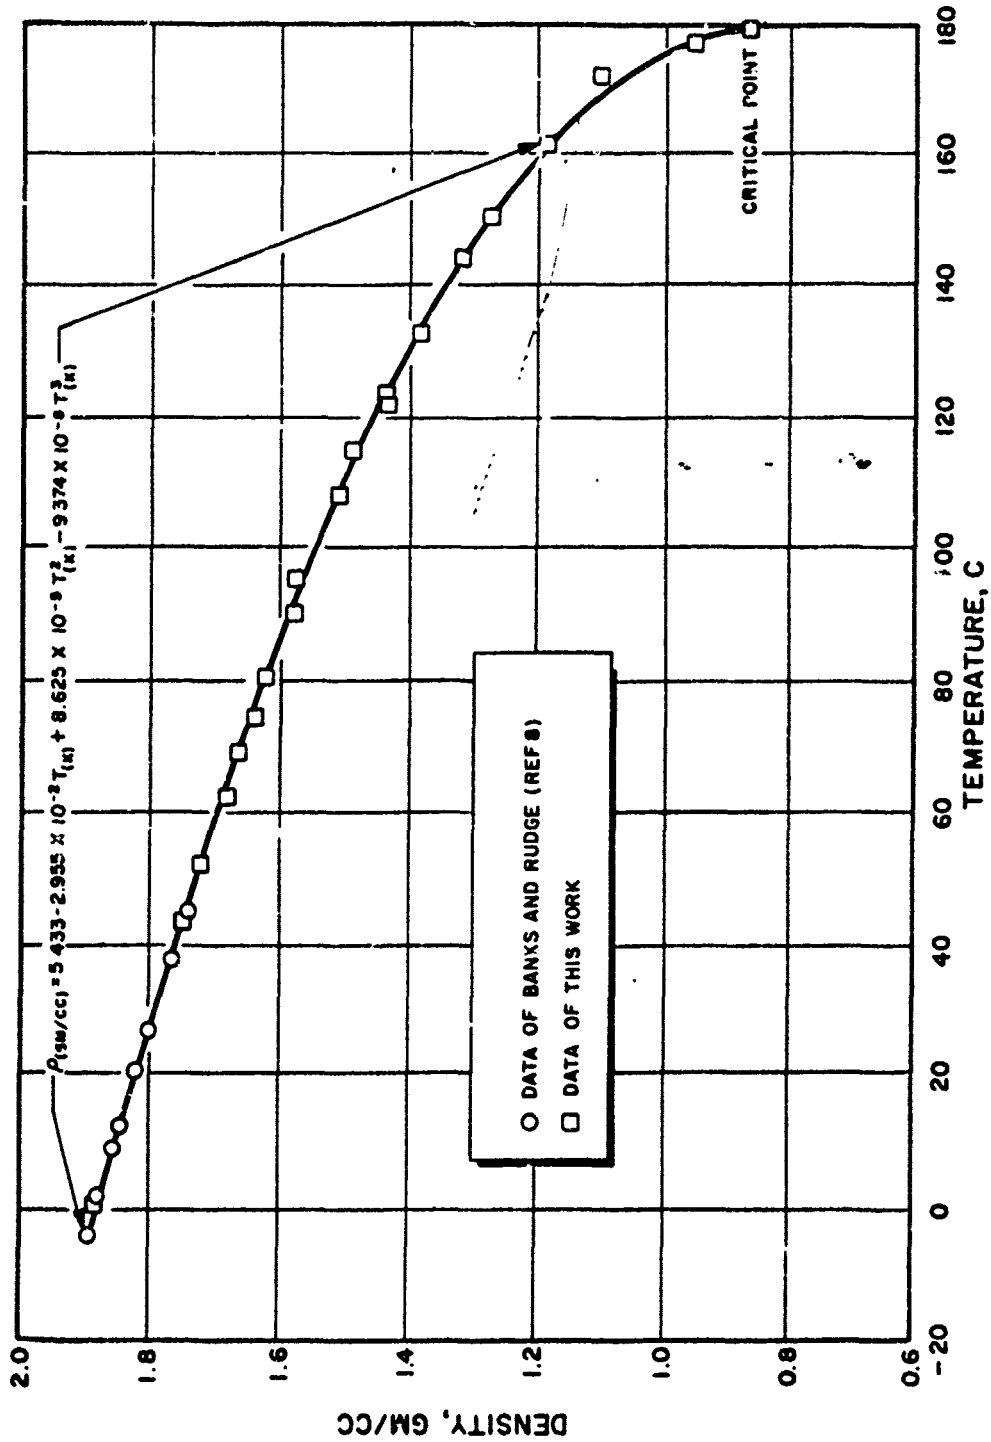


Figure 12. Density vs. temperature Curve for C1F<sub>3</sub>

CONFIDENTIAL



CONFIDENTIAL

AFRPL-TR-66-122

The composition of the  $\text{ClF}_3$  sample used in the density and vapor pressure measurements was  $> 99.5$  weight percent,  $< 0.05$  weight percent  $\text{ClF}$ ,  $< 0.01$  weight percent  $\text{Cl}_2$ ,  $< 0.02$  weight percent  $\text{F}_2$ ,  $< 0.01$  weight percent  $\text{ClO}_2$ ,  $0.4$  weight percent  $\text{HF}$ .

Vapor Pressure of Chlorine Trifluoride. Three vapor pressure runs were conducted on  $\text{ClF}_3$  (sample composition identical to that of the density sample) with the constant volume apparatus. All  $\text{ClF}_3$  vapor pressure data generated under this program are tabulated in Table 8. These data are in agreement with data obtained by Grisard, et al. (Ref. 6) at lower temperatures.

Additional pressure-volume-temperature relationships are being determined with the constant volume vapor pressure apparatus at reduced  $\text{ClF}_3$  loadings to determine the exact values of critical density and pressure and to increase the accuracy of the vapor pressure curve. The vapor pressure data will be fitted with a suitable curve-fit equation by a least squares computer program when these runs are completed.

Critical Temperature of Chlorine Trifluoride. Critical temperature determinations were made on two different samples of  $\text{ClF}_3$  (sample assay  $> 99$  weight percent  $\text{ClF}_3$ ) in two different capillaries. The temperatures resulting from observations of the  $\text{ClF}_3$  liquid-vapor meniscus disappearance were in close agreement (within 1 degree C). The average value for  $\text{ClF}_3$  critical temperature by this method was established as  $179.6 \pm 0.5$  C ( $355.3$  F).

#### Inert Gas Solubility Measurements

The apparatus for inert gas solubility measurements was designed for initial use with  $\text{ClF}_3$ ; the high chemical activity and probable low inert gas solubility of this compound will provide a stringent test of the apparatus prior

CONFIDENTIAL

**CONFIDENTIAL**

AFRPL-TR-66-122

TABLE 8

EXPERIMENTAL VAPOR PRESSURE DATA FOR  $\text{ClF}_3$

Run No.	Temperature, C	Pressure, psia
1	42.65	74
1	80.85	143
1	110.00	278
1	136.40	482
1	159.73	758
1	173.18	980
2	42.80	54
2	71.43	119
2	116.85	331
2	154.03	668
3	39.45	37
3	73.55	141
3	101.65	263
3	133.05	479
3	163.30	797
3	174.48	961

**CONFIDENTIAL**

**CONFIDENTIAL**

AFRPL-TR-66-122

to its use with additional propellants. Because of materials compatibility limitations (no compatible nonmetallic seals for dynamic application) imposed in the case of  $\text{ClF}_3$ , a simple technique which uses no moving parts (except valves) has been adopted. In this technique the inert gas is introduced from a volume calibrated reservoir into a volume calibrated test tank containing a known quantity of propellant. The volume of the gas absorbed at a known temperature and after agitation is calculated from pressure changes that occur in the system. These pressure changes are monitored by two precision differential pressure transducers.

The entire apparatus (Fig. 13) has been assembled into a reasonably compact unit which has been mounted in a thermostat equipped air box (16 x 31 x 36 inches). The temperature conditioning box is supported upon a rocking platform which will be used in agitating the test solution until equilibrium conditions are attained. Adequate thermostatic control within the air box is maintained by use of six heaters and two circulation fans. A variable transformer regulates power to four of the heaters, and a temperature controller supplies the power to two heaters. Improvement in thermal control was achieved by covering a major portion of the inside walls of the box with aluminum tape.

The complete unit consists of a metal plate to which all parts of the apparatus are mounted. The solubility test tank, a differential pressure transducer, a total pressure transducer and associated valves are mounted on one side. The gas reference volume system, which includes four gas reservoir chambers, a differential pressure transducer, a total-pressure transducer, and associated valves, are mounted on the other side. Two valves on the test tank side, which will be manipulated during the experimental determinations, have been mounted so that the valve handles protrude through the metal plate. This enables all functioning valves of both the reference volume and the test tank to be manipulated from the same side.

**CONFIDENTIAL**

CONFIDENTIAL

AFRPL-TR-66-122

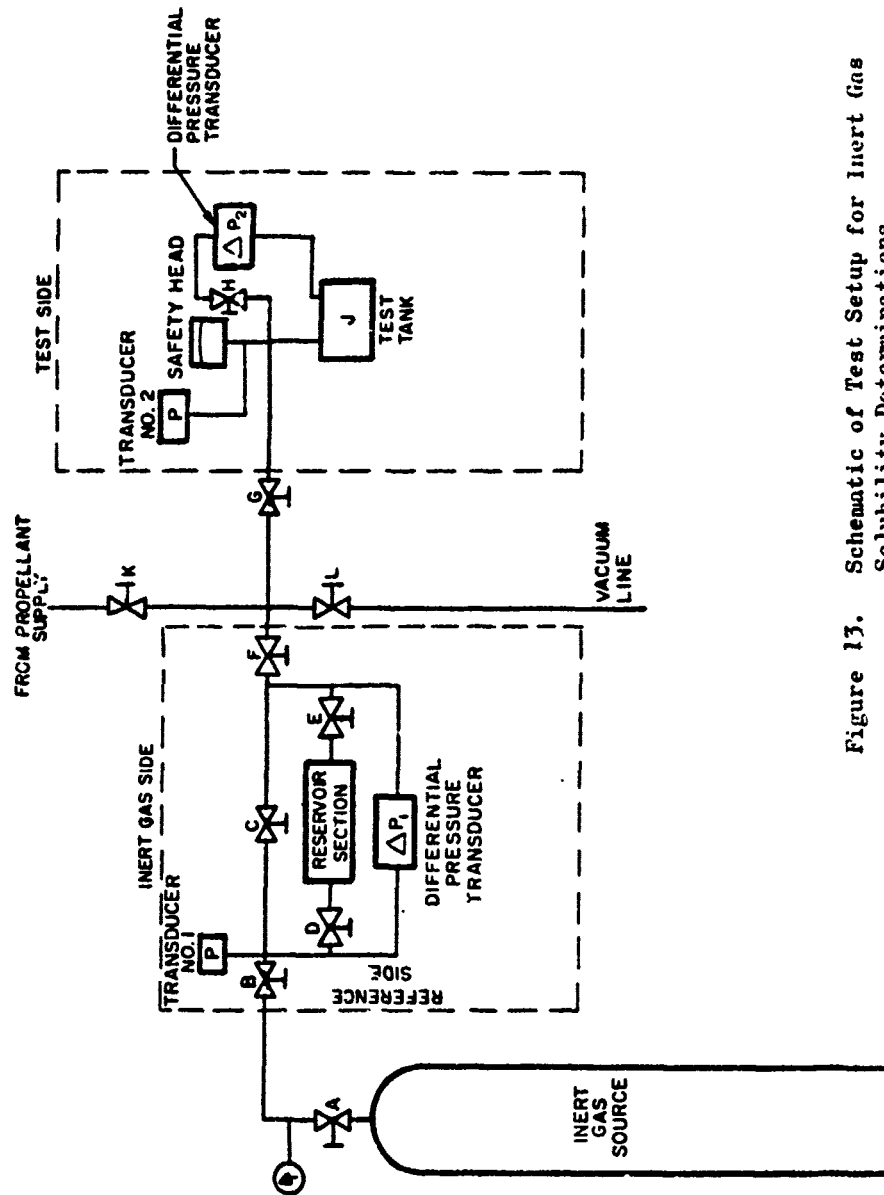


Figure 13. Schematic of Test Setup for Inert Gas Solubility Determinations

CONFIDENTIAL

**CONFIDENTIAL**

AFRPL-TR-66-122

It had been intended that the valves used during the experimental run would be remotely controlled air-operated valves. Anticipated leakage rates with these valves made them undesirable, therefore, positive-sealing bellows hand valves are used. By utilization of the multiple chambers (with appropriate valving) in the reservoir section of the apparatus, the basic design has been made flexible enough to account for several ranges of solubility. This will facilitate any necessary volumetric changes indicated during preliminary solubility measurements.

The operation of the apparatus may be described briefly as follows:

1. With valve G closed, the inert gas is admitted to both sides of  $\Delta P_1$  transducer. The appropriate inert gas volume is selected by opening or closing valves to the multiple chamber reservoir. Valves B and C are closed, and the reference pressure is locked in.
2. With a known quantity of propellant loaded into the test tank, valve H is closed. Valve G is opened and then closed.
3. Pressure transducer  $\Delta P_1$  registers a decrease; and transducer  $\Delta P_2$  registers an increase which decreases upon agitation of the test cell.

These pressure changes, the temperature, and the volumes can be used to calculate the amount of inert gas absorbed. The necessary calculations will be discussed when the first solubility data are reported.

Step 2 of the operating procedure represents a single increment in pressure and can be repeated until the desired final pressure is achieved.

Calibration of the reference and test volumes of the solubility apparatus with  $N_2$  (g) and the differential pressure transducers has been completed. Initial tests with  $ClF_5$  will be run at about 100 F in the saturation to 1000 psia range. Solubility will be measured with  $\leq 20$  psi differential driving pressure. The two differential pressure transducers and the two

**CONFIDENTIAL**

**CONFIDENTIAL**

AFRPL-TR-66-122

total pressure transducers have been calibrated accordingly. The test side of the solubility apparatus has been passivated with  $\text{ClF}_3$  and about 500 gms of  $\text{ClF}_3$  have been loaded into the system. Preliminary solubility tests with nitrogen are under way. Information from these first tests will be used primarily to test assumptions and to determine more precisely what volume of  $\text{ClF}_3$  should be used to yield the best accuracy.

#### Viscosity Measurements

As a part of the program, viscosity measurements were planned for a variety of propellants at extended temperatures and pressures. Chlorine pentafluoride characterizes the special problems of corrosivity and high pressures that will be encountered in this work. To satisfy all potential viscosity requirements, an all-metal capillary viscometer was designed for the measurements. The fabrication of the prototype unit is nearing completion.

Several alternative techniques of viscosity measurement were considered, including oscillating-body and falling-body approaches. All possibilities are hindered by one basic condition, the necessity or desirability of confining the liquid in an all-metal system capable of withstanding fairly high pressures and corrosive action without excessive deterioration. This requirement ultimately imposes difficulties in design, construction, or procedure which render ordinary experimental techniques unattractive.

The capillary flow technique was selected for its relative simplicity of construction and operation. In capillary flow measurements, viscosity is obtained by observing the flowrate through capillary tubing and the corresponding driving fluid head, usually a simple gravity head. Both of the parameters in turn involve observing the position of at least one gas-liquid interface in the flow system, which, in conventional glass capillary viscometers, is a direct visual observation.

**CONFIDENTIAL**

**CONFIDENTIAL**

AFRPL-TR-66-122

The central idea of the present concept is to follow the motion of a gas-liquid interface within steel tubing by means of a magnetic steel float at the interface and a differential transformer surrounding the tube. A tube thus equipped can serve as either the source or catch reservoir for a capillary flow operation. Flowrates and gravity heads are calculated from a volumetric calibration of the liquid-filled system volume.

Fabrication of the float and transformer units was completed during the third quarter of the program. The floats are simple cylindrical cups designed to fit closely in 0.75 x 0.049-inch steel tubing. The cylindrical differential transformer surrounds a 6-inch length of the tubing. These units underwent preliminary testing with a water-filled system to determine their operating characteristics. In the intended mode of operation the transformer lacked sensitivity to float position. However, an alternative method was developed in which the secondary coils of the transformer are used as two arms of the impedance bridge. With this concept, float position can be accurately sensed over the entire transformer span, and the utility of this detector is enhanced. Tests were also conducted to ascertain the reproducibility of the transformer-float signal vs liquid level position under conditions of changing level. Lack of equilibrium between float and liquid is not expected to introduce uncertainties if the rate of fall is level or reasonably slow.

The first viscometer design incorporated conventional capillary tubing of about 0.01-inch ID and 1/4 inches in length. Some units of this type prepared for use in the viscometer were not serviceable because of plugged bores. In the present design, the viscometer will utilize relatively long, large-bore capillary tubing, typically 0.025-inch ID and 30 inches long. The larger tubing will help reduce the possibility of plugging or otherwise altering the bore. Also, the larger tubing provides for the necessary flow impedance and flowrates at lower velocities, thus reducing the importance of frictional losses at the tubing ends. These losses, which are nonlinear in viscosity, and therefore difficult to calibrate, can be important at the low viscosities (approaching 0.001-inch stroke) to be measured.

**CONFIDENTIAL**

**CONFIDENTIAL**

AFRPL-TR-66-122

With the liquid-gas interface detection system there are various ways in which the flow system may be arranged to carry out repeated capillary flow tests. These various arrangements would not differ conceptually, but merely in form of use and calibration. In the viscometer configuration selected, the source and catch reservoirs are simply two limbs of a "U-tube" connected by the capillary tubing. The 3/4-inch tubing equipped for interface detection is one of these reservoirs; the other is a choice between 1.5-inch and 0.375-inch tubing sections. Thus, with a given volume of liquid, the observable height of interface displacement may be used to set up either a small driving head with the large-bore reservoir, or a relatively large head with the small reservoir. This choice provides added control over the duration of a flow experiment. In addition, a given viscosity may be measured in the same capillary at substantially different Reynolds numbers. Hence, the effect of frictional end losses may be directly observed and corrections applied at the lower viscosities as necessary.

The entire assembly of reservoirs, capillary tubing, and accessory plumbing, nearly 5 feet long, will be contained within a thermal-control dry box. Some difficulties were experienced in supporting the unit to obtain a straight, strain-free capillary run. Bending of the capillary would have reduced the problems arising from lack of compactness with the long capillary, but any useful bends would introduce frictional effects nonlinear in viscosity and would tend to invalidate the advantages of the long capillary. The present capillary location is such that the capillary tubing will receive little mechanical stress from the remaining plumbing and may be replaced with relative ease.

The viscometer flow system is complete except for installation of the capillary itself which will be the final step in assembly. The current activity is to complete the heating and circulation system of the temperature control box. After the assembly is complete, the temperature control system will be checked to ensure satisfactory temperature uniformity over the capillary length. The float-transformer detection system will be

**CONFIDENTIAL**



**CONFIDENTIAL**

AFRPL-TR-66-122

tested and calibrated in place. The capillary tubing will then be calibrated against liquids of known viscosity prior to actual viscosity measurements on  $\text{ClF}_5$ . These initial measurements will extend the present  $\text{ClF}_5$  data described under Phase III to higher temperatures and pressures.

**CONFIDENTIAL**

**CONFIDENTIAL**

AFRPL-TB-66-122

**PHASE III: DATA EVALUATION**

**OBJECTIVE**

Phase III constituted the overall analysis, internal correlation, and evaluation of propellant properties data. The initial effort, based on Air Force requirements and early results of the literature survey, was directed at establishment of propellant property requirements for Phase II experimental characterization. Re-evaluation and modification (either additions or deletions) in the scope of Phase II effort was to be made, if required, during the continuation of Phase III effort. Necessary changes in the property requirements were to be approved by the Air Force Project Engineer. During the remainder of the program, Phase III efforts were directed toward evaluation and compilation of the data generated during Phases I and II.

**RESULTS AND ACCOMPLISHMENTS**

**Propellant Property Requirements**

Phase III effort was initiated with a preliminary evaluation of data obtained from a rapid review of the literature under Phase I. This review provided an initial summary of the missing properties for each of the propellants of immediate interest to the Air Force. For the most part, these propellants had not been defined with respect to thermal conductivities, dielectric constants, electrical conductivities, surface tensions, compressibilities (or sonic velocities), and inert gas solubilities. However, several propellants of primary importance were not adequately characterized (experimental data over wide temperature and/or pressure ranges) with respect to the basic properties of density, specific heat, and viscosity.

**CONFIDENTIAL**

**CONFIDENTIAL**

AFRPL-TR-66-122

An illustration of the original physical property data gaps for the propellants listed in Phase I is shown in Tables 9 and 10. In these illustrations, the existing data on each of the selected propellants are represented by circles divided into four main quadrants. The absence of any data is denoted by a blank circle. The existence of a few experimental points or some calculated data is represented by the first or northwest quadrant. Experimental data over a range of temperature are shown by the second (southwest) quadrant. Completion of the third quadrant indicates the existence of a majority of the essential data required for the propellant's application. Complete experimental physical characterization over all desired conditions of temperature and pressure is shown by a completed circle. A partially completed circle under critical properties indicates the absence of experimental data for one or more of the defining conditions. This summary, in addition to consideration of the immediate availability and readiness of equipment, was used to prepare the experimental priority list for Phase II.

Using these criteria, the following initial experimental plan for Phase II determinations was submitted to the Air Force Project Engineer for approval:

1. Physical property measurements were to be initiated on
  - a. Thermal conductivity of UDMH- $N_2H_4$  (50-50)
  - b. Sonic velocity (adiabatic compressibility) of  $ClF_5$
  - c. Specific heat of  $ClF_3$  from 30 F
  - d. Density of  $ClF_3$  from  $\sim 50$  C to critical point
  - e. Inert gas solubility in  $ClF_5$
  - f. Viscosity of  $ClF_5$  (over extended temperature and pressures)
2. Thermal conductivity measurements were to continue throughout the remainder of the program on propellants ranked in the order of MMH, UDMH, MHF-3, MHF-5,  $ClF_3$ ,  $H_2O_2$ , MON, Alumizine,  $B_2H_6$ , Hybalines,  $B_5H_9$ , FLOX,  $OF_2$ , and  $N_2F_4$ .

**CONFIDENTIAL**

CONFIDENTIAL

AFRPL-TR-66-122

SELECTED OXIDIZER PHYSICAL PROPERTY STATE OF THE ART

	DENSITY	THERMAL CONDUCTIVITY	HEAT CAPACITY	COMPRESSIBILITY	CRITICAL CONSTANTS	VISCOSITY
O <sub>2</sub>						
ClF <sub>5</sub>						
ClF <sub>3</sub>						
F <sub>2</sub>						
H <sub>2</sub> O <sub>2</sub> (98 PERCENT)						
H <sub>2</sub> O <sub>2</sub> (90 PERCENT)						
N <sub>2</sub> O <sub>4</sub>						
N <sub>2</sub> O <sub>4</sub> -NO						
F <sub>2</sub> -O <sub>2</sub>						
OF <sub>2</sub>						
N <sub>2</sub> F <sub>4</sub>						

CONFIDENTIAL

TABLE 10  
SELECTED FUEL PHYSICAL PROPERTY STATE OF THE ART

	DENSITY	THERMAL CONDUCTIVITY	HEAT CAPACITY	COMPRESSIBILITY	CRITICAL CONSTANTS	VISCOSITY
$N_2H_4$ -UDMH (50-50)						
$N_2H_4$						
UDMH						
MMH						
BA-1014 *						
HYBALINE A <sub>5</sub>						
HYBALINE B <sub>3</sub>						
ALUMIZINE						
$B_5H_9$						
$B_2H_6$						
MAF-1						
MAF-3						
MAF-4						
$H_2$						

\* EXAMPLE OF  $N_2H_4$ -MMH- $H_2O$  FUEL

3. Sonic velocity measurements were to continue ranked in the order of  $\text{ClF}_3$ ,  $\text{N}_2\text{O}_4$ , MON,  $\text{H}_2\text{O}_2$ , MHF-3, MHF-5, Alumizine, Hybalines,  $\text{B}_5\text{H}_9$ ,  $\text{B}_2\text{H}_6$ , FLOX,  $\text{OF}_2$ , and  $\text{N}_2\text{F}_4$ .
4. Specific heat measurements were to continue ranked in the order of UDMH- $\text{N}_2\text{H}_4$  (50-50), MMH, UDMH, MHF-3, MHF-5, Alumizine, Hybalines, MON,  $\text{H}_2\text{O}_2$ ,  $\text{F}_2$ , FLOX,  $\text{OF}_2$ , and  $\text{N}_2\text{F}_4$  in temperature ranges where data are missing.
5. Density measurements were to continue ranked in the order of UDMH- $\text{N}_2\text{H}_4$  (50-50) (160 F to 500 F), MHF-3 (freezing point to decomposition point), MHF-5 (freezing point to decomposition point), and FLOX (range of mixtures over liquidus range).
6. Inert gas solubility measurements were to continue in the order of MMH and UDMH- $\text{N}_2\text{H}_4$  (50-50) (if present data are inadequate),  $\text{ClF}_3$ , MHF-3, and MHF-5.
7. Viscosity measurements over extended temperature and pressure ranges were to continue ranked in the order of  $\text{ClF}_3$ , MHF-3, MHF-5, UDMH- $\text{N}_2\text{H}_4$  (50-50), and MMH.
8. Other properties were to be measured as the need existed.

#### Data Compilation

All original sources of data obtained through the Phase I literature survey were used to compile individual propellant bibliographies regardless of the eventual use of the data therein. However, before their inclusion in the bibliography, these sources were checked for correctness and completeness of the reference. Where Rocketdyne was unable to obtain the original source, a secondary reference was used and noted. The complete bibliography for each propellant was tabulated in a form based on references for each propellant and according to physical property.

Completed physical property bibliographies for MHF-1, MHF-3, MHF-5,  $\text{ClF}_3$ , and  $\text{ClF}_5$  are included in this report (Appendixes A through E). Each of

**CONFIDENTIAL**

AFRPL-TR-66-122

the sources included in the bibliographies has been checked for correctness and completeness of the reference. (A  $B_2H_6$  physical property bibliography has also been prepared, but the reference check is incomplete.) A short description of each of these enclosed bibliographies is given in the following paragraphs.

The MHF bibliographies are limited to physical property data. Although several quarterly reports containing the data have appeared under the referenced contracts, only the final reports were used whenever possible.

The  $ClF_3$  bibliography primarily contains sources of physical property data, but some references are also included for chemical properties. The publications cited under "General References" are a compendium of physical property data. Although these sources are secondary, they were included because of their extensive and comprehensive coverage. Sources of calculated data were used where experimental data were not available, but the eventual publication of these data will include their referencing as such.

The  $ClF_5$  bibliography includes all of the available engineering properties data; however, only original data sources have been referenced. Where data are given in both quarterly and final reports of contracts, only the final report is referenced.

#### Data Evaluation

The remaining Phase III effort has been concentrated on the reduction, evaluation, and correlation of data generated during Phases I and II. Physical property data from original publication, as located through the Phase I literature survey, are being checked for authenticity of the data (with reference to measurement technique, propellant purity, handling of results, etc.) and cataloged for future summary publications of each propellant. Within this context and as part of this effort, studies under Contract AF04(611)-9563 (Ref. 1 and 11), and Rocketdyne-sponsored

**CONFIDENTIAL**

CONFIDENTIAL

AFRPL-TR-66-122

work, a comprehensive draft of a ClF<sub>5</sub> Engineering Properties and Handling Manual has been assembled for Air Force approval and publication.

Thus far, authenticity checks have been completed on the physical property data contained in the bibliographies of the five propellants (MIF-1, MIF-3, MIF-5, ClF<sub>3</sub>, and ClF<sub>5</sub>) listed in the appendices. Although there are some conflicts in the data for various properties of some of the propellants, the authenticity check of the experimental data revealed only one potential cause of discrepancy. Experimental data on ClF<sub>5</sub> phase properties as summarized in Report RMD 5025-F (p. E-1) resulted from measurements on a propellant sample of comparatively low (~ 96 w/o ClF<sub>5</sub>) purity. Resolution of the other discrepancies will be continued and presented to the Air Force Project Engineer for approval before their publication.

Phase III data evaluation efforts also included the curve-fitting of representative data from Phase II experimental results and correlations with other data, if required. The Phase II data curve-fits and resulting graphical representations are shown in Phase III. Additional analytical evaluations are in progress to determine the correlation of the specific heat results for ClF<sub>3</sub>, CH<sub>3</sub>N<sub>2</sub>H<sub>3</sub>, and ClF<sub>5</sub>, described herein, with those of other investigators (Ref. 6, 7, and 12, respectively) at different temperature levels.

Chlorine Pentafluoride Viscosity. As a part of the data correlation efforts, experimental ClF<sub>5</sub> viscosity data resulting from two different studies (Ref. 1 and 12) with overlapping temperature ranges were curve-fitted from -130.5 to 68 F. The equation which describes the data is:

$$\log \eta_{(lb/ft-sec)} = -4.80138 + 604.145/T(R)$$

The multiple error of estimate of the least squares curve-fit shown graphically in Fig. 14 was 1.86 percent.

CONFIDENTIAL



CONFIDENTIAL

AFRPL-TR-66-122

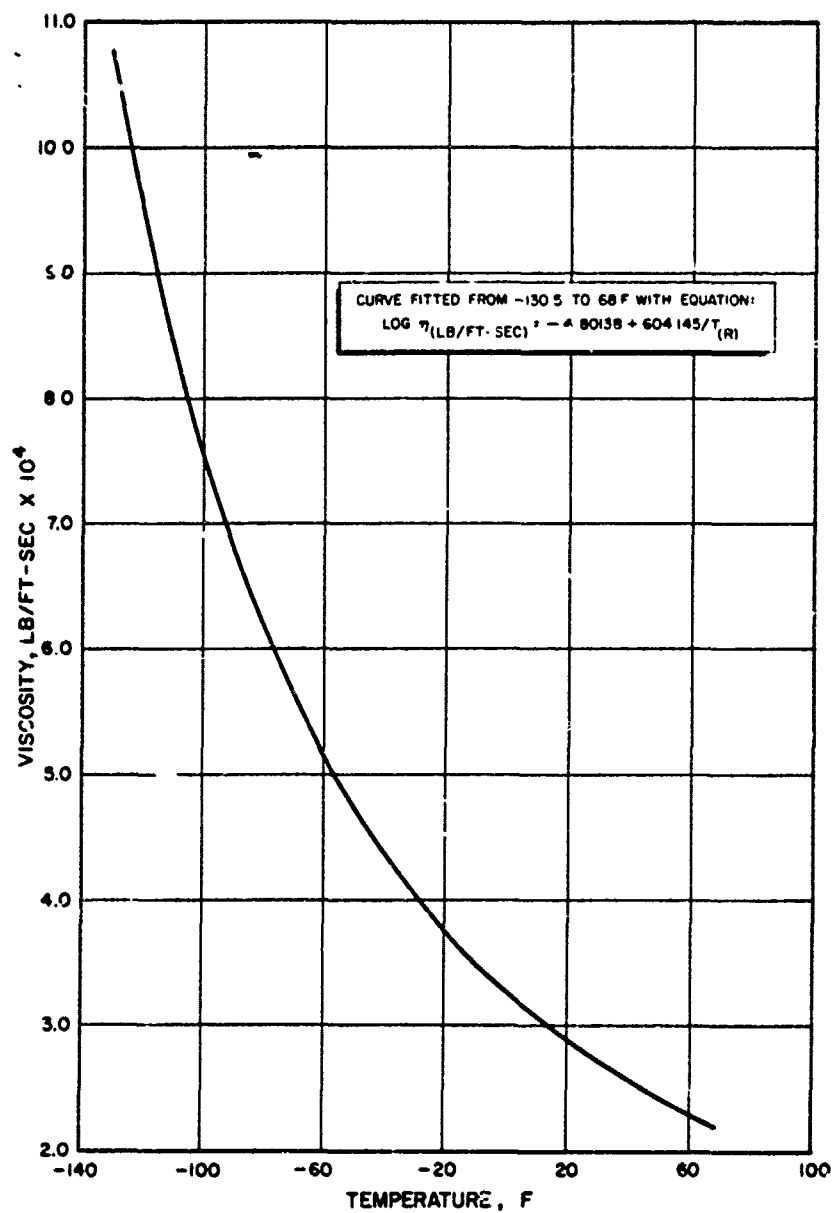


Figure 14. Viscosity of Chlorine Pentafluoride

CONFIDENTIAL

**CONFIDENTIAL**

AFRPL-TR-66-122

**FUTURE EFFORT**

The objectives and efforts described in this program have been extended for a period of 2 years under Contract AFO4(611)-11407. This new three-phase program, which was initiated on 1 April 1966, will continue the survey of propellant properties literature; extend the experimental physical characterization to additional propellants and properties; and continue the analysis, correlation, evaluation and selected summary publication of data generated in Phases I and II.

**CONFIDENTIAL**

CONFIDENTIAL

AFRPL-TR-66-122

REFERENCES

1. R-6055, Final Report, Preparation and Characterization of a New High Energy Oxidizer, Rocketdyne, a Division of North American Aviation, Inc., Canoga Park, California, AFRPL-TR-65-51, Contract AF04(611)-9563, CONFIDENTIAL.
2. Greenspan, M. and C. E. Tschiegg: "Tables of the Speed of Sound in Water," J. Acoust. Soc. Am., 31, 75 (1959).
3. Wilson, W. D.: "Speed of Sound in Distilled Water as a Function of Temperature and Pressure," J. Acoust. Soc. Am., 31, 1067 (1959).
4. NBS Circular 561, Reference Tables for Thermocouples, National Bureau of Standards, 27 April 1955.
5. Timmerman, J.: Physico-Chemical Constants of Pure Organic Compounds, Elsevier Pub. Co., New York, 1950.
6. Grisard, J. W., H. A. Bernhardt, and G. D. Oliver: "Thermal Data, Vapor Pressure and Entropy of Chlorine Trifluoride," J. Am. Chem. Soc., 73, 5725 (1951).
7. Aston, J. G., H. L. Fink, G. J. Janz, and K. E. Russell, J. Am. Chem. Soc., 73, 1939 (1951).
8. Banks, A. A. and A. J. Rudge: "The Determination of the Liquid Density of Chlorine Trifluoride," J. Chem. Soc., Vol. 1, 191 (1950).
9. Poole, D. R. and D. G. Nyberg: "High Pressure Densimeter," J. Sci. Instru., 30, 576 (1962).
10. Ambrose, D. and D. G. Grant: "Critical Temperatures of Some Hydrocarbons and Pyridine Bases," Trans. Faraday Soc., 53, 771 (1957).
11. R-6445, Addendum to Final Report, Preparation and Characterization of a New High-Energy Oxidizer, Rocketdyne, a Division of North American Aviation, Inc., Canoga Park, California, January 1966, Contract AF04(611)-9563, CONFIDENTIAL.

PREVIOUS PAGE WAS BLANK THEREFORE WAS NOT FILMED

CONFIDENTIAL

**CONFIDENTIAL**

AFRPL-TR-66-122

12. RMD 5050-F, Advanced Oxidizers for Prepackaged Liquid Engines,  
Reaction Motors Division, Thiokol Chemical Corporation, Denville,  
New Jersey, Contract NOW 64-0447-C, 31 July 1965, CONFIDENTIAL.

**CONFIDENTIAL**

CONFIDENTIAL

AFRPL-TR-66-122

APPENDIX A

MHF-1 (23.3 w/o  $N_2H_4$ , 45.3 w/o  $CH_3N_2H_3$ , 31.4 w/o  $N_2H_5NO_3$ ) BIBLIOGRAPHY

PHYSICAL PROPERTY BIBLIOGRAPHY

Composition

RMD 239-F, High Performance Storable Liquid Propellants, Reaction Motors Division, Thiokol Chemical Corporation, Denville, New Jersey, Report Period: June 1958 - May 1959, Contract NOas 58-644-c, CONFIDENTIAL.

Melting (Freezing) Point

RMD 239-F, High Performance Storable Liquid Propellants, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: June 1958 - May 1959, Contract NOas 58-644-c, CONFIDENTIAL.

RMD 2004-F, High Performance Packageable Liquid Propellants, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: Jan. - Dec. 1960, Contract NOW 60-0106-c, CONFIDENTIAL.

Boiling Point

RMD 239-F, High Performance Storable Liquid Propellants, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: June 1958 - May 1959, Contract NOas 58-644-c, CONFIDENTIAL. (Extrapolated from vapor pressure data.)

CONFIDENTIAL

**CONFIDENTIAL**

AFRPL-TR-66-122

Density, Liquid

RMD 239-F, High Performance Storable Liquid Propellants, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: June 1958 - May 1959, Contract NOas 58-644-c, CONFIDENTIAL

RMD 2004-Q3, High Performance Packageable Liquid Propellants, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: July - Sept. 1960, Contract NOw 60-0106-c, CONFIDENTIAL

Vapor Pressure

RMD 239-F, High Performance Storable Liquid Propellants, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: June 1958 - May 1959, Contract NOas 58-644-c, CONFIDENTIAL.

RMD 2004-F, High Performance Packageable Liquid Propellants, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: Jan. - Dec. 1960, Contract NOw 60-0106-c, CONFIDENTIAL.

Heat Capacity, Liquid

RMD 2004-F, High Performance Packageable Liquid Propellants, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: Jan. - Dec. 1960, Contract NOw 60-0106-c, CONFIDENTIAL.

Viscosity, Liquid

RMD 239-F, High Performance Storable Liquid Propellants, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: June 1958 - May 1959, Contract NOas 58-644-c, CONFIDENTIAL.

**CONFIDENTIAL**

**CONFIDENTIAL**

AFRPL-TR-66-122

Decomposition

RMD 1150-F, Research Program to Study Interhalogen Oxidizer Systems,  
Reaction Motors Div., Thiokol Chemical Corporation, Denville, New  
Jersey, Report Period: April - Oct. 1959, Contract NOas 59-6209-c,  
CONFIDENTIAL.

Toxicity

CRDLR 3104, Acute Toxicity of a Mixed Hydrazine Fuel (MIF-1), Chemical  
Research and Development Laboratories, Army Chemical Center, Maryland.

**CONFIDENTIAL**

CONFIDENTIAL

AFRPL-TR-66-122

APPENDIX B

MHF-3 (86 w/o  $\text{CH}_3\text{N}_2\text{H}_3$ , 14 w/o  $\text{N}_2\text{H}_4$ ) BIBLIOGRAPHY

PHYSICAL PROPERTY BIBLIOGRAPHY

Composition

RMD 5046-F, Advanced Propellants Investigation for Prepackaged Liquid Engines, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: May 1964 - June 1965, Contract N600(19)62259, CONFIDENTIAL.

Physical Properties, Compendia

RMD 5046-F, Advanced Propellants Investigation for Prepackaged Liquid Engines, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: May - Aug. 1964, Contract N600(19)62259, CONFIDENTIAL.

Melting (Freezing) Point

AGC 1426, Summary, Investigation of Liquid Rocket Propellants, Aerojet-General Corp., Azusa, California, Report Period: Jan. 1948 - Dec. 1957, Contract N70nr-462, CONFIDENTIAL.

Boiling Point

RMD 5046-F, Advanced Propellants Investigation for Prepackaged Liquid Engines, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: May 1964 - June 1965, Contract N600(19)62259, CONFIDENTIAL.

B-1

CONFIDENTIAL



**CONFIDENTIAL**

AFRPL-TR-66-122

Density, Liquid

RMD 1150-F, Research Program to Study Interhalogen Oxidizer Systems, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: April - Oct. 1959, Contract NOas 59-6209-c, CONFIDENTIAL.

RMD 5073-Q1, Advanced Propellants for Prepackaged Liquid Engine, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, 11 August 1965, Contract NOas 65-0575-c, CONFIDENTIAL.

Vapor Pressure

RMD 5046-F, Advanced Propellants Investigation for Prepackaged Liquid Engines, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: May 1964 - June 1965, Contract N600(19)62259, CONFIDENTIAL.

Viscosity, Liquid

RMD 2004-F, High Performance Packageable Liquid Propellants, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: Jan. - Dec. 1960, Contract NOw 60-0106-c, CONFIDENTIAL.

**CONFIDENTIAL**

CONFIDENTIAL

AFRPL-TR-66-122

APPENDIX C

MHF-5 (55 w/o  $\text{CH}_3\text{N}_2\text{H}_3$ , 26 w/o  $\text{N}_2\text{H}_4$ , 19 w/o  $\text{N}_2\text{H}_5\text{NO}_3$ ) BIBLIOGRAPHY

PHYSICAL PROPERTY BIBLIOGRAPHY

Composition

RMD 5005-F, Packaged Liquid Propellants, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: Jan. - Sept. 1962, Contract N0w 62-0785-c, CONFIDENTIAL.

Melting (Freezing) Point

RMD 5005-F, Packaged Liquid Propellants, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: Jan. - Sept. 1962, Contract N0w 62-0785-c, CONFIDENTIAL.

Boiling Point

RMD 5046-F, Advanced Propellant Investigation for Prepackaged Liquid Engines, Reaction Motors Div., Thiokol Chemical Corporation, Report Period: May 1964 - June 1965, Contract N600(19)62259, CONFIDENTIAL.

Density

RMD 5005-F, Packaged Liquid Propellants, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: Jan. - Sept. 1962, Contract N0w 62-0785-c, CONFIDENTIAL.

RMD 5046-F, Advanced Propellant Investigation for Prepackaged Liquid Engines, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: May 1964 - June 1965, Contract N600(19)62259, CONFIDENTIAL.

CONFIDENTIAL

**CONFIDENTIAL**

AFRPL-TR-66-122

Vapor Pressure

RMD 5005-F, Packaged Liquid Propellants, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: Jan. - Sept. 1962, Contract NOW 62-0785-c, CONFIDENTIAL.

RMD 5046-F, Advanced Propellant Investigation for Prepackaged Liquid Engines, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: May 1964 - June 1965, Contract N600(19)62259, CONFIDENTIAL.

Heat Capacity

RMD 5046-F, Advanced Propellant Investigation for Prepackaged Liquid Engines, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: May 1964 - June 1965, Contract N600(19)62259, CONFIDENTIAL.

Viscosity

RMD 5005-F, Packaged Liquid Propellants, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: Jan. - Sept. 1962, Contract NOW 62-0785-c, CONFIDENTIAL.

Flash Point

RMD 5046-F, Advanced Propellant Investigation for Prepackaged Liquid Engines, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: May 1964 - June 1965, Contract N600(19)62259, CONFIDENTIAL.

**CONFIDENTIAL**

**CONFIDENTIAL**

AFRPL-TR-66-122

Shock Sensitivity

RMD 5005-F, Packaged Liquid Propellants, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: Jan. - Sept. 1962, Contract N0w 62-0785-c, CONFIDENTIAL.

Decomposition Rate

RMD 5046-F, Advanced Propellant Investigation for Prepackaged Liquid Engines, Reaction Motors Div., Thiokol Chemical Corporation, Denville, New Jersey, Report Period: May 1964 - June 1965, Contract N600(19)62259, CONFIDENTIAL.

**CONFIDENTIAL**

CONFIDENTIAL

AFRPL-TR-66-122

APPENDIX D

CHLORINE TRIFLUORIDE BIBLIOGRAPHY

GENERAL IDENTIFICATION

Molecular Weight

International Atomic Weights, 1959

Molecular Structure

Burbank, Robinson, D., and Bensey, Frank N., "The Structure of the Interhalogen Compounds. I. Chlorine Trifluoride at  $-120^{\circ}$ ," J. Chem. Phys., 21, 602-8 (1953).

Pitzer, Kenneth, "Bonding in Xenon Fluorides and Halogen Fluorides," Science, 139, 414-5 (1963).

Smith, D. F., "The Microwave Spectrum and Structure of Chlorine Trifluoride," J. Chem. Phys., 21, 609-14 (1953).

General References

AECU-4720, Rogers, Max T., "Physical Properties of the Halogen Fluorides and Their Solutions," U. S. Atomic Energy Commission, 1959.

AGC LRP 178, Physical Properties of Liquid Propellants, Aerojet-General Corp., Sacramento, California, 13 July 1960.

The Battelle Memorial Institute, Liquid Propellant Handbook, Vol. 2, "Miscellaneous," 1958, CONFIDENTIAL.

Greenwood, N. N., "Physicochemical Properties of the Interhalogen Compounds," Revs. Pure Applied Chem. (Australia), 1, 84-120 (1951).

CONFIDENTIAL

CONFIDENTIAL

AFRPI-TR-66-122

Liquid Propellant Information Agency, Liquid Propellant Manual, "Chlorine Trifluoride," 1958.

NARTS 55, Reinhardt, T. F. (ed.), Final Report, Chlorine Trifluoride and Its Use as an Oxidizer of Rocket Fuels - A Critical Review, U. S. Naval Air Rocket Test Station, Dover, New Jersey, December 1954, CONFIDENTIAL.

P.S.M.Co. CT-1, Manual, Chlorine Trifluoride, Properties and Methods of Handling, Pennsalt Chemicals, Pennsylvania Salt and Manufacturing Co., Philadelphia, Pa., Revised 9 June 1952.

RR 59-48, Propellant Properties Manual, "Chlorine Trifluoride," Rocketdyne, a Division of North American Aviation, Inc., Canoga Park, California, 1 February 1960.

Shishkov, Yu D., and Opalovskii, A. A., "Physicochemical Properties of Chlorine Trifluoride," Uspekhi. Khim., 29, 760-73 (1960).

TA-8532-2, Technical Bulletin, Chlorine Trifluoride (CTF) and Other Halogen Fluorides, General Chemicals Div., Allied Chemical and Dye Corp. (Baker and Adamson Products), New York, N. Y.

Vincent, L. M., and Gillardeau, J., "Chlorine Trifluoride," Comm. Energie At. (France), Rappt. CEA No. 2360 (1963).

#### PHASE PROPERTIES

##### Melting (Freezing) Point

Grisard, J. W., Bernhardt, H. A., and Oliver, George D., "Thermal Data, Vapor Pressure and Entropy of Chlorine Trifluoride," J. Am. Chem. Soc., 73, 5725-7 (1951)

Ruff, Otto, "New Developments in Fluorine Chemistry," Angew. Chem., 46, 739-42 (1933).

Ruff, Otto, and Krug, Herbert, "A New Chlorofluoride  $\text{ClF}_3$ ," Z. anorg. allgem. Chem., 190, 270-76 (1930).

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

Transition Point

Grisard, Bernhardt, and Oliver, op. cit.

Boiling Point

Grisard, Bernhardt, and Oliver, op. cit.

Ruff and Krug, op. cit.

Ruff, op. cit.

Banks, A. A., and Rudge, A. J., "The Determination of the Liquid Density of Chlorine Trifluoride," J. Chem. Soc., 1950, 191-3.

Triple Point

Grisard, Bernhardt, and Oliver, op. cit.

Critical Constants

Grisard, Bernhardt, and Oliver, op. cit.

Ruff and Krug, op. cit.

Density, Liquid

Banks and Rudge, op. cit.

NOTS TP 3002, Quarterly Progress Report 290, Densities of Liquid Oxidizers, (Nyberg, D. G., and Poole, D. R.), April-June 1962, CONFIDENTIAL.

Rocketdyne, this contract.

CONFIDENTIAL

**CONFIDENTIAL**

AFRPL-TR-66-122

Density, Vapor

Banks, A. A., Davies, A., and Rudge, A. J., "The Determination of the Surface Tension and Viscosity of Liquid Chlorine Trifluoride," J. Chem. Soc., 1953, 732-5.

Vapor Pressure

Grisard, Bernhardt, and Oliver, op. cit.

Ruff and Krug, op. cit.

P.S.M.Co. CT-1, op. cit.

Surface Tension

Banks, Davies, and Rudge, op. cit.

Rogers, Max T., and Garver, Emerson E., "Viscosities and Surface Tensions of Some Liquid Halogen Fluorides," J. Phys. Chem., 62, 952-4 (1958).

Coefficient of Thermal Expansion

Roberts, J. E., Leigh, G. A., and Taylor, A. J., "The Ignition of Liquid Mono-Propellants for Guns," Armament Design Establishment, Ministry of Supply, Tech. Note A.D.E. (Long) 54/R113, April 1954, p. 26, CONFIDENTIAL.

Parachor

Banks, Davies, and Rudge, op. cit.

**CONFIDENTIAL**



CONFIDENTIAL

AFRPL-TR-66-122

THERMODYNAMIC PROPERTIES

General References, Compendia of Thermodynamic Data

JANAF Thermochemical Data, 30 June 1961.

NARTS 55, Reinhardt, T. F. (ed.), op. cit.

Rossini et al., "Selected Values of Chemical Thermodynamic Properties," Circular 500, National Bureau of Standards, U. S. Government Printing Office, Washington, D.C., pp. 26, 549, February 1952.

Scheer, M. D., "Thermodynamic Properties of Chlorine Trifluoride," J. Chem. Phys., 20, 924 (1952).

Heat of Formation

Evans, William H. Munson, Thomas R., and Wagman, Donald D., "Thermodynamic Properties of Some Gaseous Halogen Compounds," J. Research Natl. Bur. Stds., 55, 147-64 (1955). (calculated)

NARTS 55, Reinhardt, T. F. (ed.), op. cit. (calculated)

Schmitz, H., and Schumacher, H. J., "The Heat of the Reaction  $1/2 F_2 + 1/2 Cl_2 = ClF$ ," Z. Naturforschg., 2a, 362 (1947).

"Chlorine Trifluoride," JANAF Thermochemical Data, the Dow Chemical Company, Thermal Laboratory, Midland, Michigan, March 1966, CONFIDENTIAL. (calculated)

Heat of Fusion

Grisard, Bernhardt, and Oliver, op. cit.

Heat of Transition

Grisard, Bernhardt, and Oliver, op. cit.

CONFIDENTIAL

Heat of Vaporization

Evans, Munson, and Wagman, op. cit. (calculated)  
Grisard, Bernhardt, and Oliver; op. cit. (calculated)  
Ruff and Krug, op. cit.

Heat Capacity, Solid

Grisard, Bernhardt, and Oliver, op. cit.

Heat Capacity, Liquid

Grisard, Bernhardt, and Oliver, op. cit.  
Rocketdyne, this contract.

Heat Capacity, Vapor

Claassen, Howard H., Weinstock, Bernard, and Malm, John G.,  
"Vibrational Spectra and Thermodynamic Properties of  $\text{ClF}_3$  and  $\text{BrF}_3$ ,"  
J. Chem. Phys., 28, 285-9 (1958). (calculated)  
Scheer, Milton D., op. cit. (calculated)  
Shäfer, V. K., and Wicke, E., "Raman Spectrum, Symmetry, and  
Thermodynamic Properties of Chlorine Trifluoride," Z. Elektrochem.,  
52, 205-9 (1948). (calculated)

Entropy

Claassen, Weinstock, and Malm, op. cit.  
Evans, Munson, and Wagman, op. cit.  
Grisard, Bernhardt, and Oliver, op. cit.  
Scheer, Milton D., op. cit.  
Shäfer, V. K., and Wicke, E., op. cit.

CONFIDENTIAL

AFRPL-TR-66-122

Weber, Alfons, and Ferigle, Salvador M., "Thermodynamic Properties of Chlorine Trifluoride," J. Chem. Phys., 20, 1497 (1952).

Heat of Dissociation

Shafer, V. K., and Wicke, E., op. cit.

Heat of Reaction

Schmitz and Schumacher, "The Equilibrium  $\text{ClF} + \text{F}_2 = \text{ClF}_3$ ," op. cit.

Schmitz, H., and Schumacher, H. J., "The Equilibrium  $\text{ClF}_3 + \text{ClF}_3 = (\text{ClF}_3)_2$ ," Z. Naturforschg., 2a, 363 (1947).

Energy of Activation

Rogers and Garver, op. cit. (calculated)

Force Constants

Long, D. A., and Jones, D. T. L., "Force Constant Calculations. V. In Plane Vibrations of Chlorine Trifluoride,  $\text{ClF}_3$ ," Trans. Faraday Soc., 59, 273-5 (1963).

TRANSPORT PROPERTIES

Viscosity

Banks, Davies, and Rudge, op. cit.

Rogers and Garver, op. cit.

Thermal Conductivity

AGC LRP 178, op. cit. (calculated)

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

ELECTROMAGNETIC PROPERTIES

Dipole Moment

Magnuson, Dale W., "Dielectric Constant Measurements of Chlorine Trifluoride at 9400 Mc/sec.," J. Chem. Phys., 20, 229-32 (1952).

Magnuson, Dale W., "Microwave Dielectric-Constant Measurements," J. Chem. Phys., 24, 344-7 (1956).

Rogers, Max T., Pruett, R. D., and Speirs, John L., "The Electric Moments of Some Interhalogen Compounds," J. Am. Chem. Soc., 77, 5280-2 (1955).

Dielectric Constant

Magnuson, Dale W., J. Chem. Phys., 20, op. cit.

Magnuson, Dale W., J. Chem. Phys., 24, op. cit.

Rogers and Garver, op. cit.

Rogers, Max T., Thompson, H. Bradford, and Speirs, John L., "Dielectric Constants of Liquid Chlorine Trifluoride and Iodine Pentafluoride," J. Am. Chem. Soc., 76, 4841-3 (1954).

Electric Conductivity

Banks, A. A., Emeléus, H. J., and Woolf, A. A., "Electrical Conductivity of Chlorine Trifluoride, Bromine Trifluoride, and Iodine Pentafluoride," J. Chem. Soc., 1949, 2861-5.

PCC 8518-ASPR-12/64, Annual Summary Progress Report, Synthesis of Inorganic Oxidizers, Pennsalt Chemicals Corp., Wyndmoor, Pa. Contract AF04(611)-8518, 1 November 1963 - 1 December 1964, CONFIDENTIAL.

CONFIDENTIAL

Magnetic Susceptibility

Rogers, Max T., Panish, M. B., and Speirs, John L., "The Magnetic Susceptibilities of Chlorine Trifluoride, Bromine Trifluoride, Bromine Pentafluoride, and Iodine Pentafluoride," J. Am. Chem. Soc., 77, 5292-3 (1955).

Magnetic Properties, Paramagnetism and Diamagnetism

Rogers, Panish, and Speirs, op. cit.

Polarization, Electric and Molar

Magnuson, Dale W., J. Chem. Phys., 20, op. cit.

Magnuson, Dale W., J. Chem. Phys., 24, op. cit.

Rogers, Pruett, and Speirs, op. cit.

OPTICAL AND SPECTROSCOPIC PROPERTIES

Infrared Spectrum

Claassen, Weinstock, and Malm, op. cit.

Jones, E. A., Parkinson, T. F., and Murray R. B., "The Infrared and Raman Spectra of Chlorine Trifluoride," J. Chem. Phys., 17, 501-2 (1949).

Raman Spectrum

Claassen, Weinstock, and Malm, op. cit.

Jones, Parkinson, and Murray, op. cit.

CONFIDENTIAL

AFRPL-TR-66-122

Shäfer, and W. C. Kne, op. cit.

Vibrational Spectrum

Claassen, Weinstock, and Malm, op. cit.

Nuclear Magnetic Resonance

Alexakos, Louis G., and Cornwall, C. D., "Collision-Narrowing Technique for Nuclear Magnetic Resonance Studies of Gases at Moderate Pressures," J. Chem. Phys., 39, 1616-17 (1963).

Alexakos, Louis G., and Cornwall, C. D., "Nuclear Magnetic Resonance (NMR) Spectra of  $\text{ClF}_3$  and  $\text{ClF}$ : Gaseous Spectra and Gas-to-Liquid Shifts," J. Chem. Phys., 41, 2098-107 (1964).

Index of Refraction

Rogers, Max T., Malik, Jim G., and Speirs, John L., "The Refractive Indexes and Molar Refractions of Some Halogen Fluorides and Fluorocarbon Derivatives in the Vapor State," J. Am. Chem. Soc., 78, 46-7 (1956).

CHEMICAL PROPERTIES

General Chemistry and Reactions

Booth, Harold S., and Pinkston, John T., Jr., "The Halogen Fluorides," Chem. Rev., 41, 421-39 (1947).

NARTS 55, Reinhardt, T. F. (ed.) op. cit.

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

PCC-8518 QPR Nos. 1-10, Quarterly Progress Reports, Synthesis of Inorganic Oxidizers, Pennsalt Chemicals Corp., King of Prussia, Pa. Contract AF04(611)-8518, CONFIDENTIAL.

RMD 5005-F, Final Report, Packaged Liquid Propellants, Reaction Motors Div., Thiokol Chem. Corp., Denville, N. J., Report Period: Jan. - Sept 1962, Contract NOW 62-0785-c, CONFIDENTIAL.

Ruff, and Krug, op. cit.

Shishkov and Opalovskii, op. cit.

#### Solubility

NARTS 55, Reinhardt, T. F. (ed.), op. cit.

P.S.M.Co. CT-1, op. cit.

RM 585-392, P-3 Quarterly Progress Report, Rocketdyne, a Division of North American Aviation, Inc., Canoga Park, Calif., 6 January 1960.

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

APPENDIX E

CHLORINE PENTAFLUORIDE BIBLIOGRAPHY

PHYSICAL PROPERTIES

Phase Properties

R-5369, Final Report, Research in the Synthesis of High-Energy Storable Oxidizers, Rocketdyne, a Division of North American Aviation, Inc., Canoga Park, California, RTD-TDR-1117, Contract AF04(611)-7023, December 1963, CONFIDENTIAL.

R-6055, Final Report, Preparation and Characterization of a New High Energy Oxidizer, Rocketdyne, a Division of North American Aviation, Inc., Canoga Park, California, AFRPL-TR-65-51, Contract AF04(611)-9563, April 1965, CONFIDENTIAL.

R-6147, Final Report, Physico-Chemical Characterization of High-Energy Storable Propellants, Rocketdyne, a Division of North American Aviation, Inc., Canoga Park, California, AFRPL-TR-65-125, Contract AF04(611)-9380, May 1965, CONFIDENTIAL.

R-6555, Final Report, Engineering Properties of Rocket Propellants, Rocketdyne, a Division of North American Aviation, Inc., Canoga Park, California, AFRPL-TR-66-122, Contract AF04(611)-10546, January 1966, CONFIDENTIAL. (This report)

RMD 5025-F, Heterogeneous Propellant Program, Reaction Motors Division, Thiokol Chemical Corporation, Denville, New Jersey, Report Period: 17 December 1962 to 1963, Contract N0w 63-0396-c, CONFIDENTIAL.

CONFIDENTIAL



**CONFIDENTIAL**

AFRPI-TR-66-122

RMD 5036-F, Advanced Earth Storable Liquid Propellants, Reaction Motors Division, Thiokol Chemical Corporation, Denville, New Jersey, Contract NOW 63-0740-c, February 1965, CONFIDENTIAL.

RMD 5050-F, Advanced Oxidizers for Prepackaged Liquid Engines, Reaction Motors Division, Thiokol Chemical Corporation, Denville, New Jersey, Contract NOW 64-0447-c, 31 July 1965, CONFIDENTIAL.

0801-01-2, Evaluation of High Energy Materials as Liquid Propellants, Aerojet-General Corporation, Azusa, California, Contract DA-04-495-AMC-255(Z), January 1964, CONFIDENTIAL.

Thermodynamic Properties

R-5369, Rocketdyne, op. cit.

R-6055, Rocketdyne, op. cit.

RMD 5050-F, Reaction Motors Division, op. cit.

AR-1S-63, Preparation and Characterization of Compound F<sub>11</sub>BG and Its Mixtures With Other Oxidizers, Dow Chemical Co., Midland, Michigan, RTD-TDR-63-1065, Contract AF04(611)-8524, 5 July 1963, CONFIDENTIAL.

PR No. 16, Rocket Propellant Research and Development, American Cyanamid, Stamford, Connecticut, Contract NOrd 18728, August 1964, CONFIDENTIAL.

Transport Properties

R-6055, Rocketdyne, op. cit.

R-6248-3, Rocketdyne, op. cit.

RMD 5050-F, Reaction Motors Division, op. cit.

**CONFIDENTIAL**

CONFIDENTIAL

AFRPL-TR-66-122

Electromagnetic Properties

R-6055, Rocketdyne, op. cit.

QPR 6, Synthesis of Inorganic Oxidizers, Pennsalt Chemical Company, King of Prussia, Pennsylvania, Report Period: 1 March 1964 to 1 June 1964, Contract AF04(611)-8518, CONFIDENTIAL.

CHEMICAL PROPERTIES

R-6055, Rocketdyne, op. cit.

R-6147, Rocketdyne, p. cit.

RMD 5050-F, Reaction Motors Division, op. cit.

PR-19, Research on High Energy Oxidizers for Advanced Solid Rocket Propellants, Allied Chemical Corp., Morristown, New Jersey, Contract DA-30-069-ORD-2638, 31 December 1963, CONFIDENTIAL.

PR-20, Research on High Energy Oxidizers for Advanced Solid Rocket Propellants, Allied Chemical Corp., Morristown, New Jersey, Contract DA-30-069-ORD-2638, 31 March 1964, CONFIDENTIAL.

PR-21, Research on High Energy Oxidizers for Advanced Solid Rocket Propellants, Allied Chemical Corp., Morristown, New Jersey, Contract DA-30-069-ORD-2638, 30 June 1964, CONFIDENTIAL.

PR-22, Research on High Energy Oxidizers for Advanced Solid Rocket Propellants, Allied Chemical Corp., Morristown, New Jersey, Contract DA-30-069-ORD-2638, 30 September 1964, CONFIDENTIAL.

PR-23, Research on High Energy Oxidizers for Advanced Solid Rocket Propellants, Allied Chemical Corp., Morristown, New Jersey, Contract DA-30-069-ORD-2638, 31 December 1964, CONFIDENTIAL.

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

AFRPL-TR-65-62, Synthesis of New Oxidizers for Solid Propellants, Monsanto Research Corp., Everett, Massachusetts, Report Period: 1 October 1963 through 31 January 1965, Contract AF04(611)-8520, CONFIDENTIAL.

QSR. No. 5, Fluorine Oxidizers, Union Carbide Research Institute, Tarrytown, New York, Report Period: 1 June 1964 to 1 September 1964, Contract DA-31-124-ARO(D)-77.

QSR. No. 6, Fluorine Oxidizers, Union Carbide Research Institute, Tarrytown, New York, Report Period: 1 September 1964 to 1 December 1964, Contract DA-31-124-ARO(D)-77, CONFIDENTIAL.

Streng, A. G.: Solubility Tests and Some Chemical Properties of Fluoridyne (Compound A), The Research Institute of Temple University, Philadelphia, Pennsylvania, 2 December 1964, CONFIDENTIAL.

#### MIXTURES

0801-01-3, Evaluation of High Energy Materials as Liquid Propellants, Aerojet-General Corporation, Azusa, California, Contract DA-04-495-AMC-255(Z), April 1964, CONFIDENTIAL.

0801-01-4, Evaluation of High Energy Materials as Liquid Propellants, Aerojet-General Corporation, Azusa, California, Contract DA-04-495-AMC-255(Z), July 1964, CONFIDENTIAL.

0801-02-7, Evaluation of High Energy Materials as Liquid Propellants, Aerojet-General Corporation, Azusa, California. Contract DA-04-495-AMC-255(Z), April 1965, CONFIDENTIAL.

0801-02-8, Evaluation of High Energy Materials as Liquid Propellants, Aerojet-General Corporation, Azusa, California, Contract DA-04-495-AMC-255(Z), July 1965, CONFIDENTIAL.

CONFIDENTIAL

CONFIDENTIAL

AFRPL-TR-66-122

PR-24, Research on High Energy Oxidizers for Advanced Solid Rocket Propellants, Allied Chemical Corp., Morristown, New Jersey, Contract DA-30-069-ORD-2638, 31 March 1965, CONFIDENTIAL.

PR-25, Research on High Energy Oxidizers for Advanced Solid Rocket Propellants, Allied Chemical Corp., Morristown, New Jersey, Contract DA-01-021-AMC-12264(Z), 30 June 1965, CONFIDENTIAL.

PR-26, Research on High Energy Oxidizers for Advanced Solid Rocket Propellants, Allied Chemical Corp., Morristown, New Jersey, Contract DA-01-021-AMC-12264(Z), 30 September 1965, CONFIDENTIAL.

QPR No. 5, Synthesis of Inorganic Oxidizers, Pennsalt Chemicals Corp., King of Prussia, Pennsylvania, Report Period: 1 December 1963 to March 1964, Contract AF04(611)-8518, CONFIDENTIAL.

QPR 6, Pennsalt, op. cit.

QPR No. 7, Synthesis of Inorganic Oxidizers, Pennsalt Chemicals Corp., King of Prussia, Pennsylvania, Report Period: 1 June 1964 to 1 September 1964, Contract AF04(611)-8518, CONFIDENTIAL.

QPR No. 8, Synthesis of Inorganic Oxidizers, Pennsalt Chemicals Corp., King of Prussia, Pennsylvania, Report Period: 1 December 1964 to 1 March 1965, Contract AF04(611)-8518, CONFIDENTIAL.

QPR No. 9, Synthesis of Inorganic Oxidizers, Pennsalt Chemicals Corp., King of Prussia, Pennsylvania, Report Period: 1 March 1965 to 1 June 1965, Contract AF04(611)-8518, CONFIDENTIAL.

QPR No. 10, Synthesis of Inorganic Oxidizers, Pennsalt Chemicals Corp., King of Prussia, Pennsylvania, Report Period: 1 June 1965 to 1 September 1965, Contract AF04(611)-8518, CONFIDENTIAL.

QPR No. 11, Synthesis of Inorganic Oxidizers, Pennsalt Chemicals Corp., King of Prussia, Pennsylvania, Report Period: 1 September 1965 to 1 December 1965, Contract AF04(611)-8518, CONFIDENTIAL.

CONFIDENTIAL

0801-02-9, Evaluation of High Energy Materials as Liquid Propellants, Aerojet-General Corporation, Azusa, California, Contract DA-04-495-AMC-255(Z), October 1965, CONFIDENTIAL.

0801-02-10, Evaluation of High Energy Materials as Liquid Propellants, Aerojet-General Corporation, Azusa, California, Contract DA-04-495-AMC-255(Z), January 1966, CONFIDENTIAL.

PR-19, Allied, op. cit.

AFRPL-TR-62, Monsanto, op. cit.

RMD 5036-F, Reaction Motors Division, op. cit.

RMD-5061-Q1, The Formulation of New High Energy Storable Propellants, Reaction Motors Division, Thiokol Chemical Corporation, Denville, New Jersey, Contract NOW 65-0430-c, March 1965, CONFIDENTIAL.

RMD-5061-Q2, The Formulation of New High Energy Storable Propellants, Reaction Motors Division, Thiokol Chemical Corporation, Denville, New Jersey, Contract NOW 65-0430-c, 14 June 1965, CONFIDENTIAL.

RMD-5061-Q3, The Formulation of New High Energy Storable Propellants, Reaction Motors Division, Thiokol Chemical Corporation, Denville, New Jersey, Contract NOW 65-0430-c, 14 September 1965, CONFIDENTIAL.

R-6147, Rocketdyne, op. cit.

R-6218-1, Quarterly Progress Report, Physico-Chemical Characterization of High Energy Storable Propellants, Rocketdyne, a Division of North American Aviation, Inc., Canoga Park, California, Contract AF04(611)-10544, July 1965, CONFIDENTIAL.

6218-2, Quarterly Progress Report, Physico-Chemical Characterization of High Energy Storable Propellants, Rocketdyne, a Division of North American Aviation, Inc., Canoga Park, California, Contract AF04(611)-10544, October 1965, CONFIDENTIAL.

6218-3, Quarterly Progress Report, Physico-Chemical Characterization of High Energy Storable Propellants, Rocketdyne, a Division of North American Aviation, Inc., Canoga Park, California, Contract AF04(611)-10544, January 1966, CONFIDENTIAL.

#### MATERIALS COMPATIBILITY

0801-02-7, Aerojet, op. cit.

0801-02-8, Aerojet, op. cit.

0801-02-9, Aerojet, op. cit.

Research Report No. 65-26, Determine Feasibility of Modifying Certain Physico-Chemical Parameters of Liquid Propellants, Technidyne Incorporated, West Chester, Pennsylvania, Contract DA-36-034-AMC-01532, CONFIDENTIAL.

MRB3008F, Gelled High Energy Oxidizers, Monsanto Research Corporation, Everett, Massachusetts, Contract N600(19)59719, 31 March 1964, CONFIDENTIAL.

AFRPL-TR-65-62, Monsanto, op. cit.

RMD 5050-F, Reaction Motors Division, op. cit.

R-5369, Rocketdyne, op. cit.

R-6055, Rocketdyne, op. cit.

R-6445, Addendum to Final Report, Preparation and Characterization of a New High-Energy Oxidizer, Rocketdyne, a Division of North American Aviation, Inc., Canoga Park, California, Contract AF04(611)-9563, January 1966, CONFIDENTIAL.

AFML-TR-64-391, The Compatibility of Structural Materials with Hybaline A-5 and Compound A, Pennsalt Chemicals Corporation, King of Prussia, Pennsylvania, Contract AF33(657)-8461, December 1964.

LRPL QPR 4-64, Quarterly Progress Report, Picatinny Arsenal-Liquid Rocket Propulsion Laboratory, Dover, New Jersey, December 1964, CONFIDENTIAL.

Memo No. 64-050, Compatibility of Parts and Materials With Compound A, General Dynamics/Astronautics, San Diego, California, 1 October 1964, CONFIDENTIAL.

Streng, op. cit.

#### TOXICITY

R-5439, Toxicological Range Finding on New Propellants, Rocketdyne, a Division of North American Aviation, Inc., Canoga Park, California, Contract AF33(657)-7773, June 1964, CONFIDENTIAL.

#### SENSITIVITY

R-5369, Rocketdyne, op. cit.

R-6055, Rocketdyne, op. cit.

RMD 5036-F, Reaction Motors Division, op. cit.

#### PREPARATION

R-334-13, Research on Fluorine Propellants, Quarterly Progress Report, Period Ending 15 September 1960, Rocketdyne, a Division of North American Aviation, Inc., Canoga Park, California, Contract Nonr 1818(00), CONFIDENTIAL.

R-5369, Rocketdyne, op. cit.

R-5639, Research in Fluorine Chemistry, Summary Report, Rocketdyne, a Division of North American Aviation, Inc., Canoga Park, California, Contract Nonr 1818(00), 15 April 1964, CONFIDENTIAL.

R-6055, Rocketdyne, op. cit.

R-6190, Research in Fluorine Chemistry, Summary Report, Rocketdyne, a Division of North American Aviation, Inc., Canoga Park, California, Contract Nonr 1818(00), 15 June 1965, CONFIDENTIAL.

PR-19, Allied, op. cit.

QPR No. 5, Pennsalt, op. cit.

#### STORABILITY

R-6055, Rocketdyne, op. cit.

R-6445, Rocketdyne, op. cit.

RMD-5025F, Reaction Motors Division, op. cit.

RMD 5050-F, Reaction Motors Division, op. cit.

#### THERMAL STABILITY

R-6055, Rocketdyne, op. cit.

R-6147, Rocketdyne, op. cit.



CONFIDENTIAL

Security Classification

DOCUMENT CONTROL DATA - R&D		
<small>(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)</small>		
1 ORIGINATING ACTIVITY (Corporate author) Hocketdyne, a Division of North American Aviation, Inc., 6633 Canoga Avenue, Canoga Park, California		2a REPORT SECURITY CLASSIFICATION CONFIDENTIAL
		2b GROUP 4
3 REPORT TITLE  ENGINEERING PROPERTIES OF ROCKET PROPELLANTS		
4 DESCRIPTIVE NOTES (Type of report and inclusive dates) Final Report (1 April 1965 through 31 March 1966)		
5 AUTHOR(S) (Last name, first name, initial)  Constantine, M.		
6 REPORT DATE 1 July 1966	7a TOTAL NO. OF PAGES 132	7b NO. OF REFS 12
8a CONTRACT OR GRANT NO. AF04(611)-10546	9a ORIGINATOR'S REPORT NUMBER(S) R-6535	
8b PROJECT NO. 3148	9b OTHER REPORT NUM(S) (Any other numbers that may be assigned this report) AFRPL-TR-66-122	
10 AVAILABILITY/LIMITATION NOTICES		
11 SUPPLEMENTARY NOTES		12 SPONSORING MILITARY ACTIVITY Air Force Rocket Propulsion Laboratory Research and Technology Division, Air Force Systems Command, Edwards, Calif.
13 ABSTRACT The results of a 12-month program on the analytical and experimental characterization of the physical properties of selected liquid propellants are presented in three phases. In Phase I, a literature survey was conducted to update the presently available compilation of physical properties data. Phase II experimental efforts have resulted in the measurement of $N_2H_4-(CH_3)_2N_2H_2$ (50-50) and $CH_3N_2H_3$ thermal conductivity; IIRNA and $ClF_3$ sonic velocity; $ClF_3$ and $CH_3N_2H_3$ specific heat, and correction of $ClF_3$ specific heat data; $ClF_3$ phase properties; and the design and assembly of apparatuses for measurement of inert gas solubility in liquids and liquid viscosities at extended temperatures and pressures. Phase III efforts included the assembly and evaluation of physical property data on MHP-1, MHP-3, MHP-5, $ClF_3$ , and $ClF_5$ for future summary publication and correlation of all data generated in Phases I and II. (C)		

DD FORM 1473

CONFIDENTIAL

Security Classification

**Security Classification**

1A KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Liquid Propellants						
Thermal Conductivity						
Sonic Velocity						
Specific Heat						

**INSTRUCTIONS**

**1. ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (corporate author) issuing the report.

**2a. REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

**2b. GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

**3. REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parentheses immediately following the title.

**4. DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

**5. AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

**6. REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

**7a. TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

**7b. NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

**8a. CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

**8b, c, & d. PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subject number, system numbers, task number, etc.

**9a. ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

**9b. OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (either by the originator or by the sponsor), also enter this number(s).

**10. AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

**11. SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

**12. SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (paying for) the research and development. Include address.

**13. ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 130 to 225 words.

**14. KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.